

Cubic-X4

Surface mounted ceiling luminaire - Direct/indirect light distribution

Article code: CX4OWL-830H-L1200



Illustrations may only be similar and serve as an orientation.

Cubic-X4. LED. Surface-mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct light distribution and indirect lighting corona. Colour temperature: $\text{€X}^3\text{UV}$ 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. LxWxH (rectangular). L=1200mm. W=200mm. H=25+22mm. High-power current.

6087lm. 52W. 6,3kg. Binning initial \leq MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Cubic-X4

Surface mounted ceiling luminaire -
Direct/indirect light distribution

Article code: CX4OWL-830H-L1200

Customer / Project: _____

Note: _____

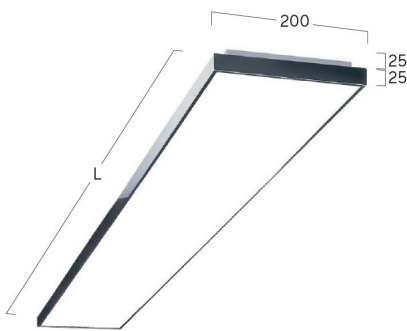

Productname	Cubic-X4
Lamp	LED
Installation Type	Surface mounted ceiling luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=1200mm
Width W (mm)	W=200mm
Height H (mm)	H=25+22mm
Current/Power	High-Power
Luminous Flux	6087lm
Power consumption	52W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	6,3kg

