

# lightnet

## Lucille-S1

Free standing luminaire - Direct light distribution

Article code: US1AAS-827M-D150-P



Illustrations may only be similar and serve as an orientation.

Lucille-S1. LED. Design floor lamp with high-quality pantograph with precision joints completely made of aluminium. Surface finish Satin Silver. Direct only light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. Switch&dim. DxWxH (luminaire head, round/Stand). D=150mm. W=568mm. H=1130/15mm. Rectangular formed floor base matching luminaire`s outer surface



colour. Medium-power current. 935lm. 13W. 12,5kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

# lightnet

## Lucille-S1

Free standing luminaire - Direct light distribution

Article code: US1AAS-827M-D150-P

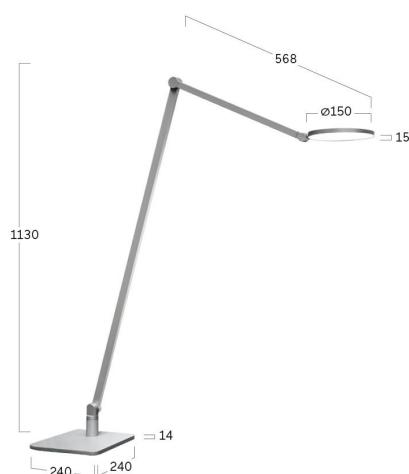

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Lucille-S1
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Satin Silver
Light characteristics	Direct light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switch&dim
Length L/Diameter D (mm)	D=150mm
Width W (mm)	W=568mm
Height H (mm)	H=1130/15mm
Base-Type	Rectangular base
Current/Power	Medium-Power
Luminous Flux	935lm
Power consumption	13W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	12,5kg

