

lightnet


Basic-S3

Free standing luminaire - Direct/indirect light distribution

Article code: BS3AWR-835M-D500-UG-A



Illustrations may only be similar and serve as an orientation.

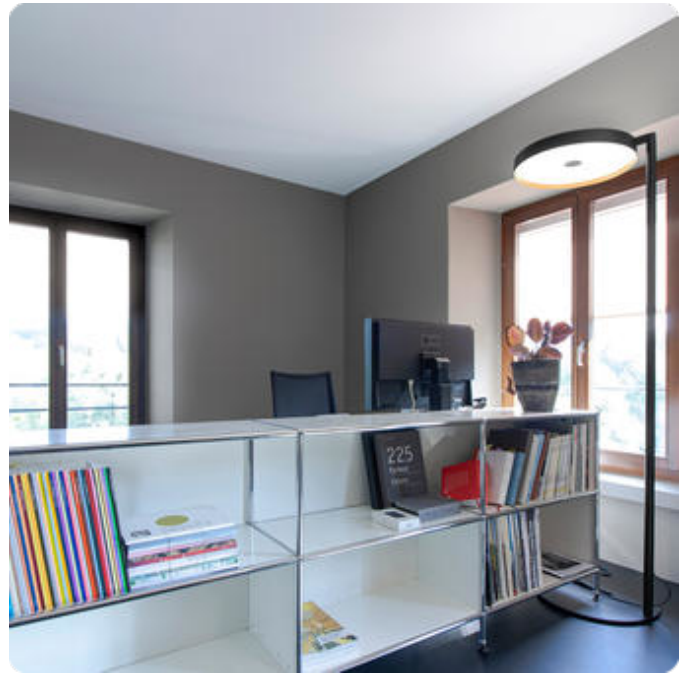



Basic-S3. LED. Free standing luminaire. Luminaire head with overall height of 58mm, diameter of 500mm and decorative ring. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 3500K (Neutral White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Reflector: Satin Gold. Swarm Control. DxWxH (luminaire head,

round/Stand). D=500mm. H=2000/58mm. Medium-power current. 11700lm. 81W. 22kg. Binning initial <= MacAdam 3. U-formed floor base matching luminaire`s outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Basic-S3

Free standing luminaire - Direct/indirect light distribution

Article code: BS3AWR-835M-D500-UG-A

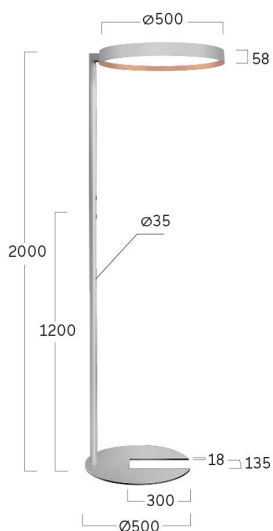

Customer / Project: _____

Note: _____

Productname	Basic-S3
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	3500K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Satin Gold
Control	Swarm Control
Length L/Diameter D (mm)	D=500mm
Height H (mm)	H=2000/58mm
Current/Power	Medium-Power
Luminous Flux	11700lm
Power consumption	81W
Base-Type	U-base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 35 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	22kg

