

## Basic-S5

Free standing luminaire - Direct/indirect light distribution

Article code: BS5AWX-830M-D600-OW-A



Illustrations may only be similar and serve as an orientation.



Basic-S5. LED. Free standing luminaire. Luminaire head with overall height of 58mm, diameter of 600mm and decorative ring. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Reflector: Snow White. Dimmable. DxWxH (luminaire head, round/Stand). D=600mm. H=2000/58mm. Medium-power

current. 11875lm. 88W. 24kg. Binning initial <= MacAdam 3. Round shaped floor base matching luminaire`s outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Basic-S5

### Free standing luminaire - Direct/indirect light distribution

Article code: BS5AWX-830M-D600-OW-A

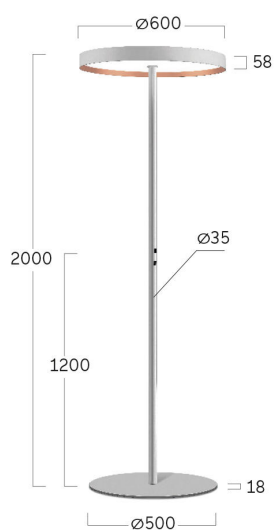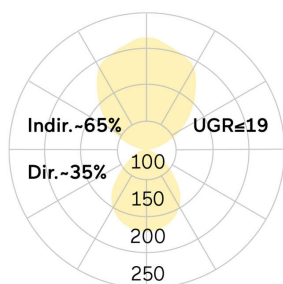

Customer / Project:

Note:

Productname	Basic-S5
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Snow White
Control	Separately dimmable
Length L/Diameter D (mm)	D=600mm
Height H (mm)	H=2000/58mm
Current/Power	Medium-Power
Luminous Flux	11875lm
Power consumption	88W
Base-Type	Round base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	24kg

