

## Beam Me Up-S6

Free standing luminaire - Direct/indirect light distribution

Article code: MS6ABX-827M-D650-UB-A



Illustrations may only be similar and serve as an orientation.

Beam Me Up-S6. LED. Design floor lamp, with a setback lens optic and interior decor. Luminaire head made of high-quality processed fiberglass. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR≤19. Reflector: Jet Black. Dimmable. DxWxH (luminaire head, round/Stand). D=650mm. H=2200/90mm. Medium-power

current. 11127lm. 93W. 33,6kg. Binning initial ≤ MacAdam 3. U-formed floor base matching luminaire's outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



## Beam Me Up-S6

Free standing luminaire - Direct/indirect light distribution

Article code: MS6ABX-827M-D650-UB-A

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

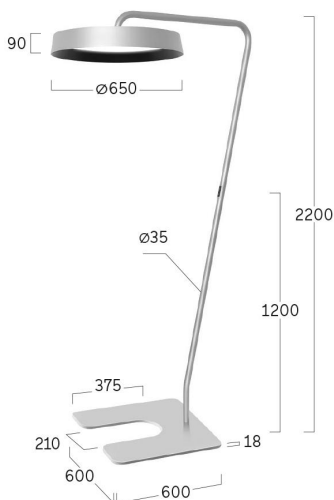

Productname	Beam Me Up-S6
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Jet Black
Control	Separately dimmable
Length L/Diameter D (mm)	D=650mm
Height H (mm)	H=2200/90mm
Current/Power	Medium-Power
Luminous Flux	11127lm
Power consumption	93W
Base-Type	U-base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 27 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	33,6kg

