

Liquid Line-SY

Free standing luminaire - Direct/indirect light distribution

Article code: QSYLWX-830M-L2940-HG-A



Illustrations may only be similar and serve as an orientation.



Liquid Line-SY. LED. Design floor lamp. Double luminaire head with fine radii made of high-quality aluminium, manufactured from one casting without visible seams.. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<= 19. Reflector: Satin Gold. Dimmable. LxWxH (luminaire head, rectangular/Stand). L=2940mm.

W=40mm. H=2200/40mm. Medium-power current. 1926lm. 170W. 23,1kg. Binning initial <= MacAdam 3. H-formed floor base matching luminaire`s outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Liquid Line-SY

Free standing luminaire - Direct/indirect light distribution

Article code: QSYLWX-830M-L2940-HG-A

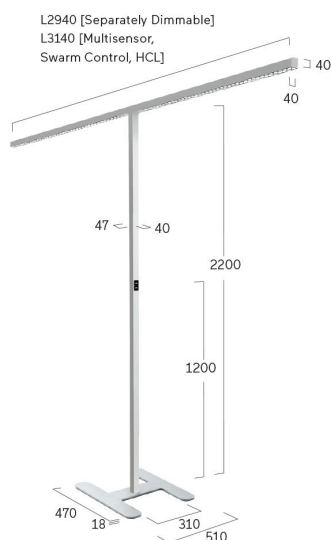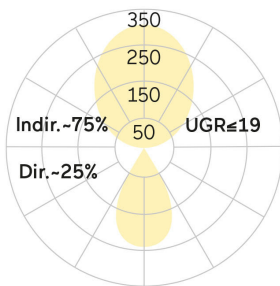

Customer / Project: _____

Note: _____

Productname	Liquid Line-SY
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Satin Gold
Control	Separately dimmable
Length L/Diameter D (mm)	L=2940mm
Width W (mm)	W=40mm
Height H (mm)	H=2200/40mm
Current/Power	Medium-Power
Luminous Flux	19261lm
Power consumption	170W
Base-Type	H-base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	23,1kg

