

Caleo-PX Inverse

Pendant luminaire - Direct/indirect light distribution

Article code: APXCWE-840E-Q900-K



Illustrations may only be similar and serve as an orientation.

Caleo-PX Inverse. LED. Pendant luminaire in soft-edge design. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal Flex Diffuser. Switchable. LxWxH (square). Q=900mm. W=40mm. H=75mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max 4000mm. Power supply: transparent. Ceiling rose:

Matching luminaire`s surface colour. Low-power current. 7880lm. 70W. 10,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25° C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Caleo-PX Inverse

Pendant luminaire - Direct/indirect light distribution

Article code: APXCWE-840E-Q900-K

Customer / Project: _____

Note: _____

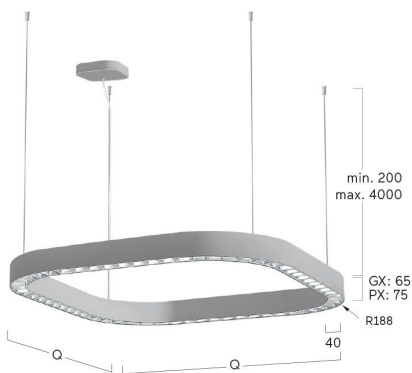

Productname	Caleo-PX Inverse
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal Flex Diffuser
Control	Switchable
Length L/Diameter D (mm)	Q=900mm
Width W (mm)	W=40mm
Height H (mm)	H=75mm
Current/Power	Low-Power
Luminous Flux	7880lm
Power consumption	70W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L90B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	10,2kg

