


Liquid Line-TX

Table light - Direct light distribution

Article code: QTXLBS-830M-L980-TG

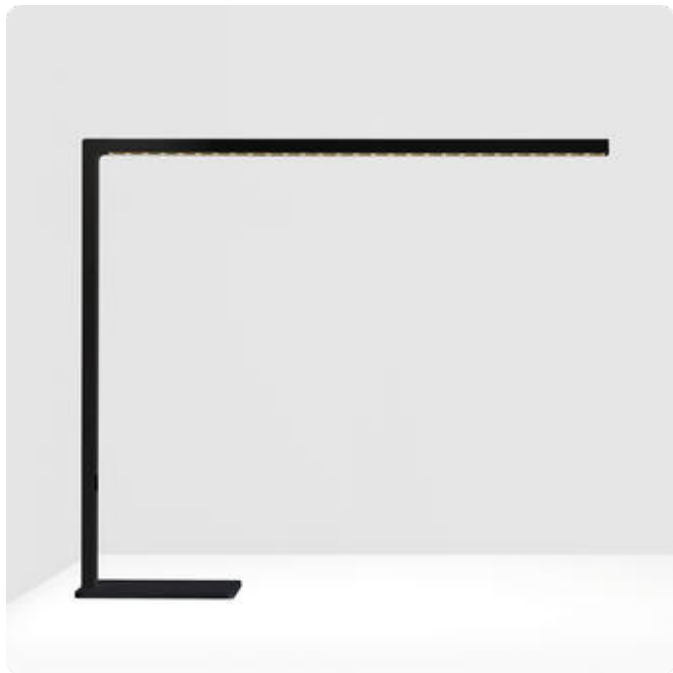

Illustrations may only be similar and serve as an orientation.




Liquid Line-TX. LED. Table light. Luminaire body with smooth bends made of aluminium, crafted in one piece with no visible seams. Surface finish Jet Black. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR≤19. Reflector: Satin Gold. Switch&dim. LxWxH (luminaire head, rectangular/Stand).

L=980mm. W=40mm. H=26/860mm. Table clamp matching luminaire's outer surface colour. Medium-power current. 1786lm. 16W. 7,7kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Liquid Line-TX

Table light - Direct light distribution

Article code: QTXLBS-830M-L980-TG

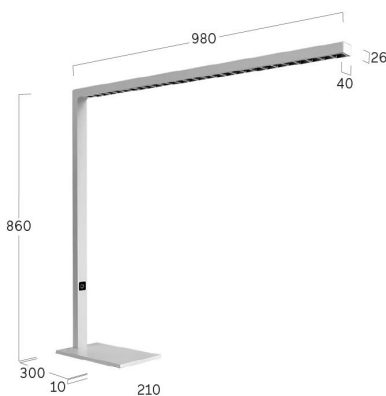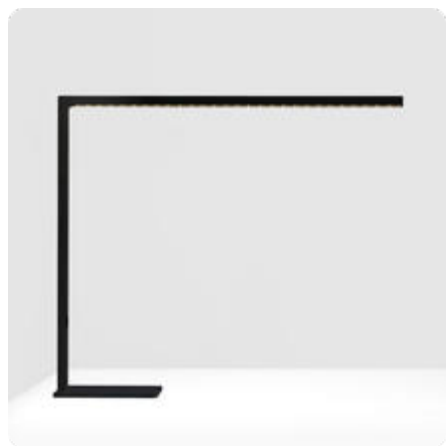

Customer / Project: _____

Note: _____

| | |
|------------------------------|--------------------------------|
| Productname | Liquid Line-TX |
| Lamp | LED |
| Installation Type | Table light |
| Surface finish | Jet Black |
| Light characteristics | Direct light distribution |
| Colour temperature | 3000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Lens Louvre |
| Reflector Colour Inside | Reflector: Satin Gold |
| Control | Switch&dim |
| Length L/Diameter D (mm) | L=980mm |
| Width W (mm) | W=40mm |
| Height H (mm) | H=26/860mm |
| Base-Type | Table clamp |
| Current/Power | Medium-Power |
| Luminous Flux | 1786lm |
| Power consumption | 16W |
| Degree of protection | IP20 |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 30 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 7,7kg |

