

Liquid Line-TX

Table light - Direct light distribution

Article code: QTXLWS-835M-L980-TB



Illustrations may only be similar and serve as an orientation.




Liquid Line-TX. LED. Table light. Luminaire body with smooth bends made of aluminium, crafted in one piece with no visible seams. Surface finish Snow White. Direct only light distribution. Colour temperature: 3500K (Neutral White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Jet Black. Switch&dim. LxWxH (luminaire head, rectangular/Stand).

L=980mm. W=40mm. H=26/860mm. Table clamp matching luminaire`s outer surface colour. Medium-power current. 1910lm. 16W. 7,7kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Liquid Line-TX

Table light - Direct light distribution

Article code: QTXLWS-835M-L980-TB

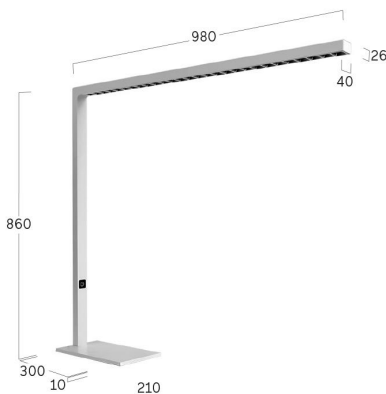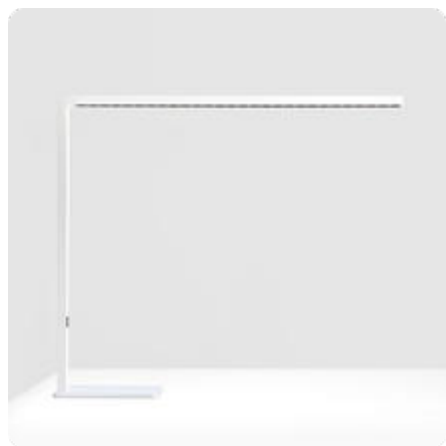

Customer / Project: _____

Note: _____

Productname	Liquid Line-TX
Lamp	LED
Installation Type	Table light
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	3500K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Jet Black
Control	Switch&dim
Length L/Diameter D (mm)	L=980mm
Width W (mm)	W=40mm
Height H (mm)	H=26/860mm
Base-Type	Table clamp
Current/Power	Medium-Power
Luminous Flux	1910lm
Power consumption	16W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 35 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	7,7kg

