

## Liquid Line-P5

Pendant luminaire - Direct/indirect light distribution

Article code: QP5LWE-830M-L139-AW



Illustrations may only be similar and serve as an orientation.



Liquid Line-P5. LED. Pendant luminaire. Luminaire body with fine radii made of aluminium, manufactured from a single casting without visible seams. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Snow White. Switchable. LxWxH (rectangular). L=139mm. W=40mm. H=140mm. Single-

cord suspension (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 1010lm. 12W. 1,5kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Liquid Line-P5

Pendant luminaire - Direct/indirect light distribution

Article code: QP5LWE-830M-L139-AW

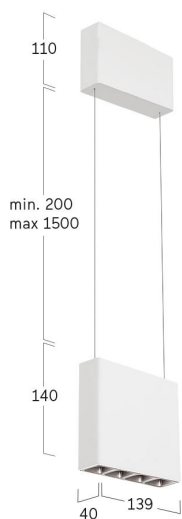

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Liquid Line-P5
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Snow White
Control	Switchable
Length L/Diameter D (mm)	L=139mm
Width W (mm)	W=40mm
Height H (mm)	H=140mm
Current/Power	Medium-Power
Luminous Flux	1010lm
Power consumption	12W
Suspension	Single susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	1,5kg

