

Plank-X4

Surface mounted luminaire - Direct/indirect light distribution Article code: JX4ASE-840H-L920



Illustrations may only be similar and serve as an orientation.



Plank-X4. LED. Surface mounted luminaire for wall or ceiling mounting. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR≤19. Switchable. LxWxH (rectangular). L=920mm. W=231mm. H=25+20mm. High-

power current. 4530lm. 38W. 5,8kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Plank-X4

Surface mounted luminaire - Direct/indirect light distribution

Article code: JX4ASE-840H-L920

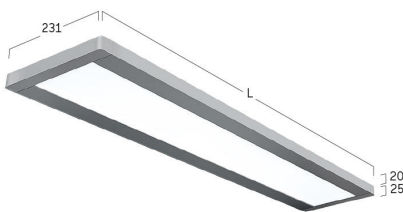

Customer / Project: _____

Note: _____

Productname	Plank-X4
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	L=920mm
Width W (mm)	W=231mm
Height H (mm)	H=25+20mm
Current/Power	High-Power
Luminous Flux	4530lm
Power consumption	38W
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	5,8kg

