

Ringo Star-PX

Pendant luminaire - Direct/indirect light distribution

Article code: RPXLWE-840M-D600-UB



Illustrations may only be similar and serve as an orientation.

Ringo Star-PX. LED. Pendant luminaire. Luminaire body made of aluminium profile with 40mm profile width. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=16. Reflector: Jet Black. Switchable. DxHxW (round). D=600mm. W=40mm. H=75mm. Central cord suspension with ceiling rose and power supply cable

(Set). Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 8030lm. 61W. 6,1kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Ringo Star-PX

Pendant luminaire - Direct/indirect light distribution

Article code: RPXLWE-840M-D600-UB

Customer / Project: _____

Note: _____

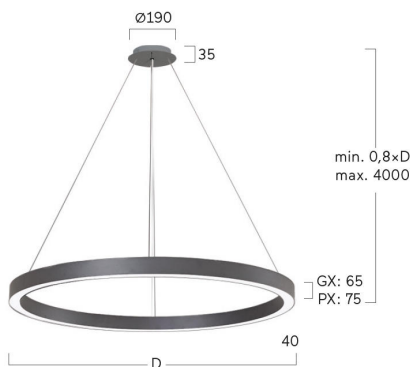

| | |
|------------------------------|---|
| Productname | Ringo Star-PX |
| Lamp | LED |
| Installation Type | Pendant luminaire |
| Surface finish | Snow White |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Lens Louvre |
| Reflector Colour Inside | Reflector: Jet Black |
| Control | Switchable |
| Length L/Diameter D (mm) | D=600mm |
| Width W (mm) | W=40mm |
| Height H (mm) | H=75mm |
| Current/Power | Medium-Power |
| Luminous Flux | 8030lm |
| Power consumption | 61W |
| Suspension | Central susp. (Set) |
| Ceiling rose colour | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm) | Pendant length max 4000mm |
| Degree of protection | IP20 |
| Cable Colour | Power supply: transparent |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR<=16 |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 6,1kg |

