


Cubic-L3

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: CL3ASE-840M-Q550-S

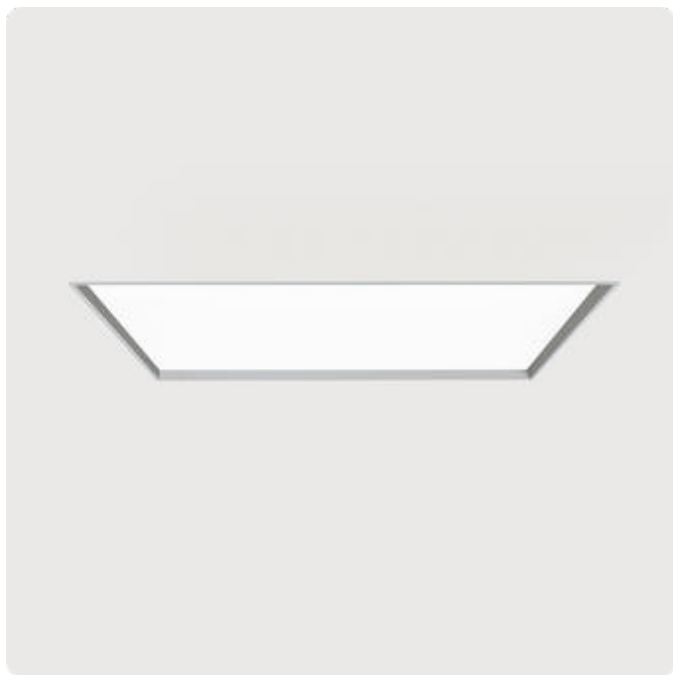

Illustrations may only be similar and serve as an orientation.

Cubic-L3. LED. Recessed mounted luminaire with surrounding frame for installation in ceilings with cut-out openings. Mounting brackets included. Luminaire body with increased stability for installation. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Reflector: Radiant Silver. Switchable. LxWxH (square). L=

550mm. W=550mm. H=100mm. Medium-power current. 3630lm. 27W. 10kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.




Cubic-L3

Recessed mounted luminaire for ceilings,
mounting brackets incl - Direct light distribution

Article code: CL3ASE-840M-Q550-S

Customer / Project: _____

Note: _____

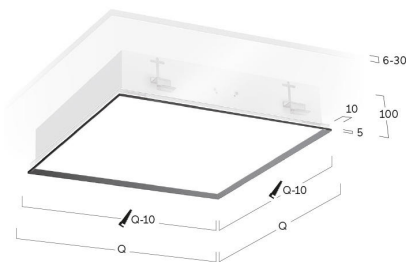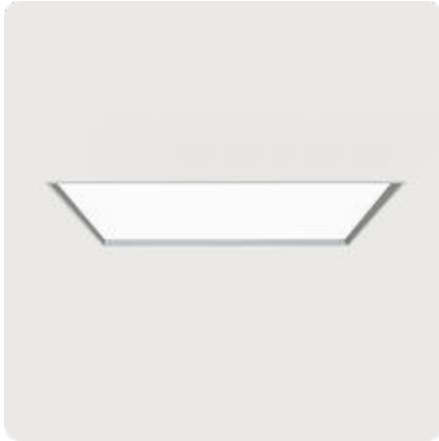

Productname	Cubic-L3
Lamp	LED
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl
Surface finish	Radiant Silver
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Radiant Silver
Control	Switchable
Length L/Diameter D (mm)	L=550mm
Width W (mm)	W=550mm
Height H (mm)	H=100mm
Current/Power	Medium-Power
Luminous Flux	3630lm
Power consumption	27W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	10kg

