

Matric-W6

Wall mounted luminaire - Direct/indirect light distribution

Article code: LW6AEE-830M-L890



Illustrations may only be similar and serve as an orientation.



Matric-W6. LED. Wall mounted luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. LxWxH (rectangular). L=890mm. W=117mm. H=60mm.

Medium-power current. 4011lm. 33W. 3,7kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Matric-W6

Wall mounted luminaire - Direct/indirect light distribution

Article code: LW6AEE-830M-L890

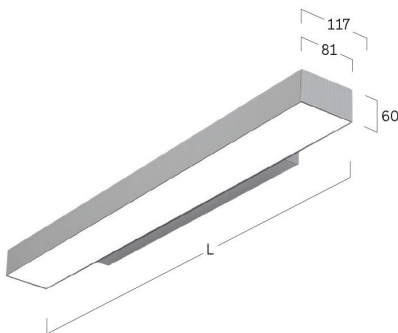

Customer / Project: _____

Note: _____

Productname	Matric-W6
Lamp	LED
Installation Type	Wall mounted luminaire
Surface finish	Silver Anodised
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	L=890mm
Width W (mm)	W=117mm
Height H (mm)	H=60mm
Current/Power	Medium-Power
Luminous Flux	4011lm
Power consumption	33W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3,7kg

