

Ringo Star-F5

Recessed mounted luminaire, mounting brackets incl -
Direct light distribution

Article code: RF5LWL-840H-D210-W-BP



Illustrations may only be similar and serve as an orientation.



Ringo Star-F5. LED. Recessed mounted luminaire for installation in ceilings with cut-out openings. Luminaire body made of aluminium profile with 40mm track width, mounting brackets incl. Surface finish Snow White. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Snow White.

Blind Plate. Dimmable DALI. DxH (round). D=210mm. H=65mm. High-power current. 2660lm. 23W. 2,8kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Ringo Star-F5

Recessed mounted luminaire, mounting brackets incl - Direct light distribution

Article code: RF5LWL-840H-D210-W-BP

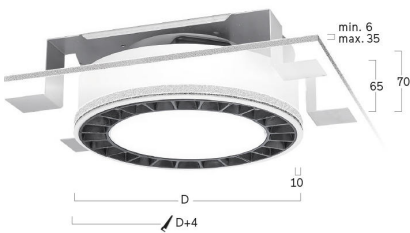

Customer / Project: _____

Note: _____

Productname	Ringo Star-F5
Lamp	LED
Installation Type	Recessed mounted luminaire, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Snow White
Central Module	Blind Plate
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=210mm
Height H (mm)	H=65mm
Current/Power	High-Power
Luminous Flux	2660lm
Power consumption	23W
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2,8kg

