

## Basic-O3

Pendant luminaire - Direct light distribution

Article code: BO3OWL-840M-D500-PG



Illustrations may only be similar and serve as an orientation.



Basic-O3. LED. Pendant luminaire. 350° rotatable and 90° tilt. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Reflector: Satin Gold. Dimmable DALI. DxH (round). D=500mm. H=58mm. Rod suspension with ceiling rose (Set). Pendant length max 1500mm. Ceiling rose:

Matching luminaire`s surface colour. Medium-power current. 2390lm. 21W. 6kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25° C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Basic-O3

Pendant luminaire - Direct light distribution

Article code: BO3OWL-840M-D500-PG

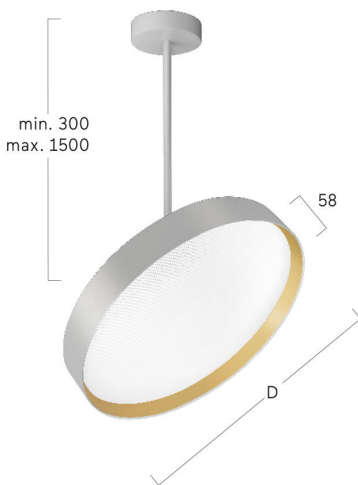

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Basic-O3
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Reflector Colour Inside	Reflector: Satin Gold
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=500mm
Height H (mm)	H=58mm
Current/Power	Medium-Power
Luminous Flux	2390lm
Power consumption	21W
Suspension	Rod susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP40
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	6kg

