

Basic-N3

Recessed mounted luminaire (trimless) for ceilings with shadow gap, mounting brackets incl - Direct/indirect light

Article code: BN3OSL-840M-D400-SW





Illustrations may only be similar and serve as an orientation.

Basic-N3. LED. Recessed mounted luminaire with shadow gap for frameless mounting in plasterboard ceilings. Mounting brackets included. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Reflector: Radiant Silver. Aura colour white. Dimmable

DALI. DxH (round). D=400mm. H=78mm. Medium-power current. 1830lm. 24W. 5,7kg. Binning initial \leq MacAdam 3. IP40. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25° C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Basic-N3

Recessed mounted luminaire (trimless) for ceilings with shadow gap, mounting brackets

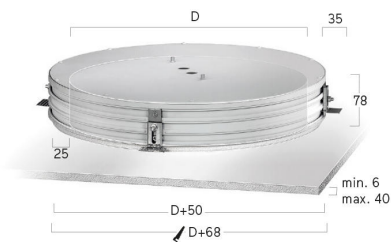

Article code: BN3OSL-840M-D400-SW

Customer / Project: _____

Note: _____

Productname	Basic-N3
Lamp	LED
Installation Type	Recessed mounted luminaire (trimless) for ceilings with shadow gap, mounting brackets incl
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Reflector Colour Inside	Reflector: Radiant Silver
Aura colour	Aura white
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=400mm
Height H (mm)	H=78mm
Current/Power	Medium-Power
Luminous Flux	1830lm
Power consumption	24W
Degree of protection	IP40
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	5,7kg

IP40

~220-240V

50-60 Hz

IK 02

RG0

≤3 MacAdam

MEDIUM POWER L85B10 50.000h

HIGH POWER L80B10 50.000h

CE

UK CA