

Basic-N3

Recessed mounted luminaire (trimless) for ceilings with shadow gap, mounting brackets incl - Direct/indirect light

Article code: BN3OWL-827M-D400-BW



Illustrations may only be similar and serve as an orientation.

Basic-N3. LED. Recessed mounted luminaire with shadow gap for frameless mounting in plasterboard ceilings. Mounting brackets included. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct light distribution and indirect lighting corona. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Reflector: Jet Black. Aura colour white. Dimmable DALI. DxH

(round). D=400mm. H=78mm. Medium-power current. 1711lm. 24W. 5,7kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Basic-N3

Recessed mounted luminaire (trimless) for ceilings with shadow gap, mounting brackets

Article code: BN3OWL-827M-D400-BW

Customer / Project: _____

Note: _____

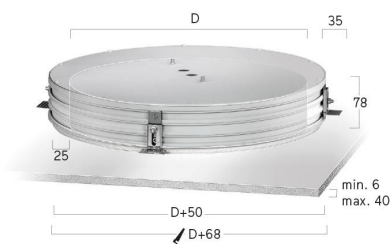

Productname	Basic-N3
Lamp	LED
Installation Type	Recessed mounted luminaire (trimless) for ceilings with shadow gap, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Reflector Colour Inside	Reflector: Jet Black
Aura colour	Aura white
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=400mm
Height H (mm)	H=78mm
Current/Power	Medium-Power
Luminous Flux	1711lm
Power consumption	24W
Degree of protection	IP40
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	5,7kg

