

## Basic-L3

Recessed luminaire for ceilings, mounting brackets incl -  
Direct light distribution

Article code: BL3AWL-840E-D330-G



Illustrations may only be similar and serve as an orientation.

Basic-L3. LED. Recessed luminaire for mounting in sawn ceiling openings, mounting brackets incl. Luminaire body with increased stability for installation. Surface finish Snow White. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR≤19. Reflector: Satin Gold. Dimmable DALI. DxH (round). D=330mm. H=100mm. Low-

power current. 880lm. 7W. 3,1kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



## Basic-L3

Recessed luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: BL3AWL-840E-D330-G

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

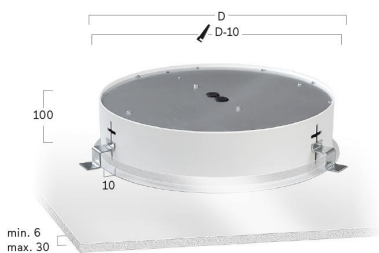

Productname	Basic-L3
Lamp	LED
Installation Type	Recessed luminaire for ceilings, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Satin Gold
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=330mm
Height H (mm)	H=100mm
Current/Power	Low-Power
Luminous Flux	880lm
Power consumption	7W
Degree of protection	IP20
LED lifetime	L90B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3,1kg

