

Basic-X3

Surface mounted luminaire - Direct/indirect light distribution Article code: BX3AWE-830M-D300-G



Illustrations may only be similar and serve as an orientation.



Basic-X3. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct light distribution and indirect lighting corona. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Reflector: Satin Gold. Switchable. DxH (round). D=300mm. H=38+

24mm. Medium-power current. 1384lm. 13W. 2,3kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Basic-X3

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX3AWE-830M-D300-G

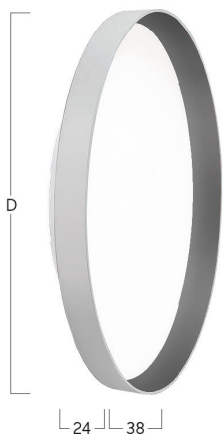

Customer / Project: _____

Note: _____

Productname	Basic-X3
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (mm)	D=300mm
Height H (mm)	H=38+24mm
Current/Power	Medium-Power
Luminous Flux	1384lm
Power consumption	13W
Degree of protection	IP40
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2,3kg

