


Midpin-C2

Spotlight for 48V tracks / Build-in Version - Direct light distribution

Article code: DC2CWL-927M-W



Illustrations may only be similar and serve as an orientation.

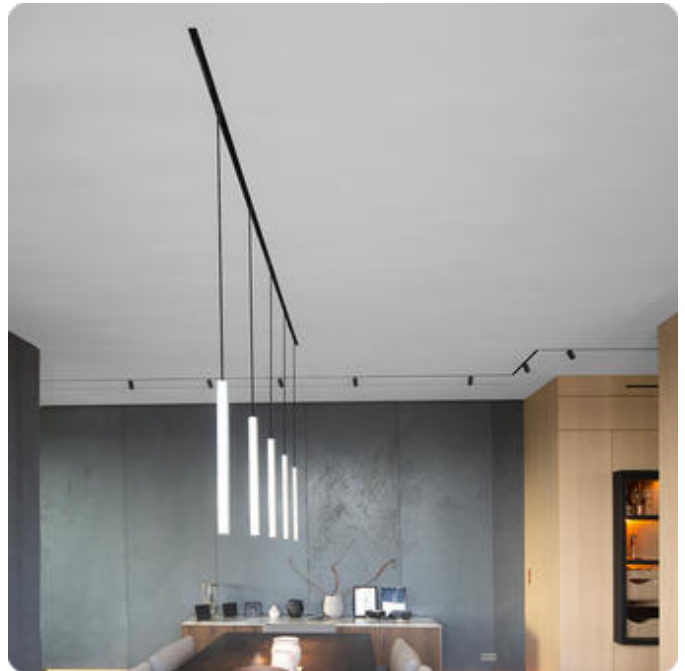

Midpin-C2. LED. Spotlight for 48V tracks with magnetic holder / Build-in Version, 350° rotation and 90° tilt. Flood 40°. Surface finish Snow White. Direct only light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >90. Reflector: Snow White. Dimmable DALI. DxH (spots). D=40mm. H=73mm. Medium-power current. 620lm. 11W. 0,8kg. Binning initial <= MacAdam 3. IP20.

Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG1 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Midpin-C2

Spotlight for 48V tracks / Build-in Version -
Direct light distribution



Article code: DC2CWL-927M-W

Customer / Project: _____

Note: _____

Productname	Midpin-C2
Lamp	LED
Installation Type	Spotlight for 48V tracks / Build-in Version
Lens Angle	Flood 40°
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>90
Reflector Colour Inside	Reflector: Snow White
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=40mm
Height H (mm)	H=73mm
Current/Power	Medium-Power
Luminous Flux	620lm
Power consumption	11W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	9 27 / 3 3 9
Photobiological class	RG1 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	0,8kg

