


## Midpoint-M6

Recessed mounted spotlight - Direct light distribution

Article code: PM6BBE-930FM-GK

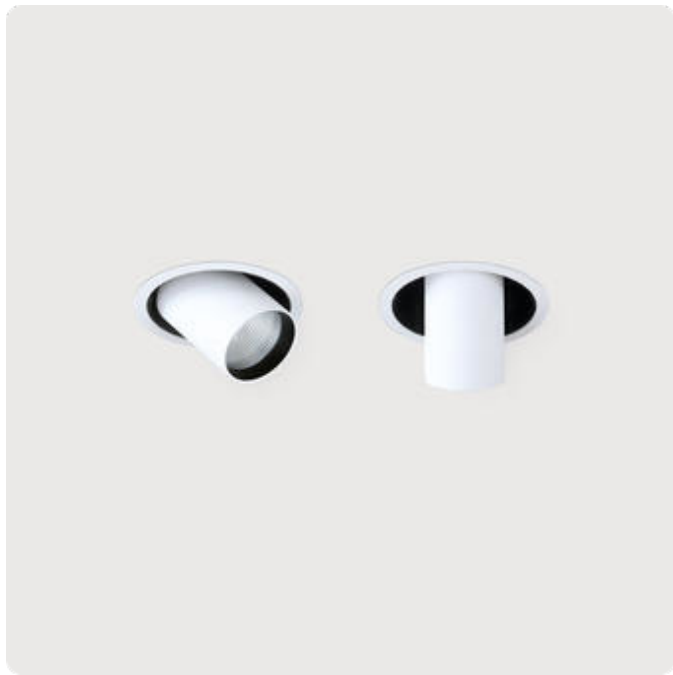

Illustrations may only be similar and serve as an orientation.


Midpoint-M6. LED. Recessed mounted spotlight. Luminaire body with increased stability for installation. Surface finish Jet Black. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >90. Reflector with beam angle MEDIUM 20°. Reflector: Satin Gold. Economic-LED: Highest efficiency, CRI>90. Clear Cover. Switchable. D (spots). D=175mm. Medium-power

current. 2640lm. 31W. 2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG1 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25° C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Midpoint-M6

Recessed mounted spotlight - Direct light distribution

Article code: PM6BBE-930FM-GK

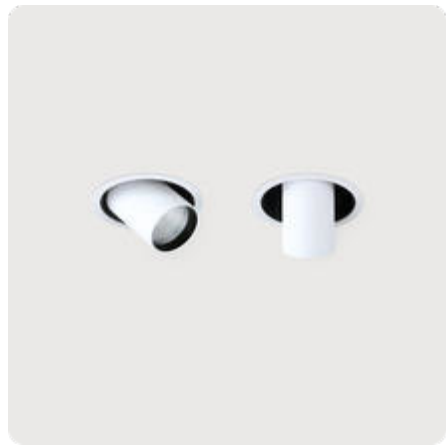

Customer / Project: \_\_\_\_\_

\_\_\_\_\_


Note: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Productname	Midpoint-M6
Lamp	LED
Installation Type	Recessed mounted spotlight
Surface finish	Jet Black
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>90
Reflector Beam Angle	Reflector: MEDIUM 20°
Reflector Colour Inside	Reflector: Satin Gold
LED-Module Type	Eco-LED (CRI>90)
Cover	Clear Cover
Control	Switchable
Length L/Diameter D (mm)	D=175mm
Current/Power	Medium-Power
Luminous Flux	2640lm
Power consumption	31W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	9 30 / 3 3 9
Photobiological class	RG1 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2kg

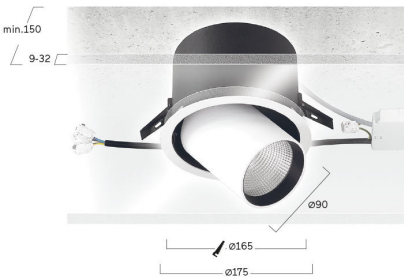

IP20

~220-240V

50-60 Hz

IK 02

RG1

≤3 MacAdam

LOW POWER L90B10 50.000h

MEDIUM POWER L85B10 50.000h

CE

UK CA