


Midpoint-P7

Pendant spotlight - Direct light distribution

Article code: PP7DBE-940FM-GKR



Illustrations may only be similar and serve as an orientation.

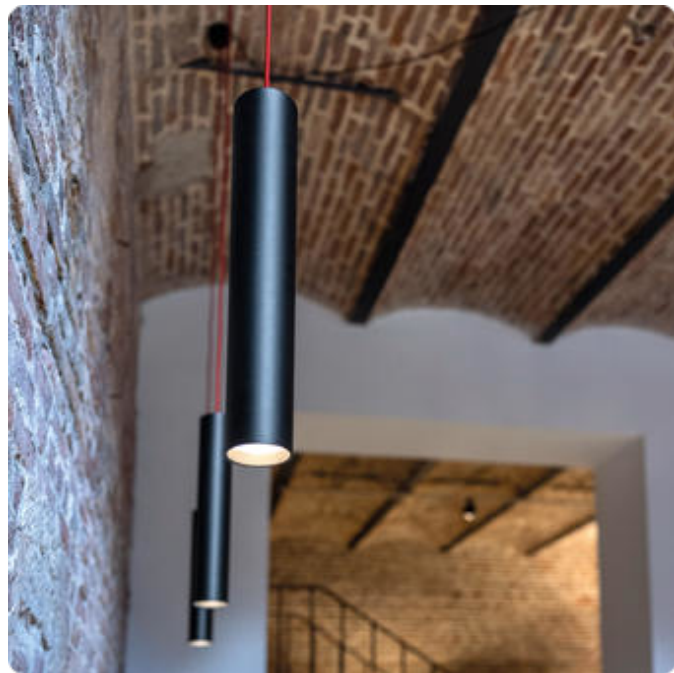

Midpoint-P7. LED. Downlight for suspended ceiling mounting. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >90. Reflector with beam angle WIDE FLOOD 50°. Reflector: Satin Gold. Economic-LED: Highest efficiency, CRI>90. Clear Cover. Switchable. DxH (spots). D=90mm. H=215mm. Pendant length max 1500mm. Power supply: red. Ceiling rose: Matching

luminaire`s surface colour. Medium-power current. 2710lm. 31W. 1,4kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG1 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Midpoint-P7

Pendant spotlight - Direct light distribution

Article code: PP7DBE-940FM-GKR



Customer / Project: _____

Note: _____

Productname	Midpoint-P7
Lamp	LED
Installation Type	Pendant spotlight
Surface finish	Jet Black
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>90
LED-Module Type	Eco-LED (CRI>90)
Reflector Beam Angle	Reflector: WIDE FLOOD 50°
Reflector Colour Inside	Reflector: Satin Gold
Cover	Clear Cover
Control	Switchable
Length L/Diameter D (mm)	D=90mm
Height H (mm)	H=215mm
Current/Power	Medium-Power
Luminous Flux	2710lm
Power consumption	31W
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP20
Cable Colour	Power supply: red
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	9 40 / 3 3 9
Photobiological class	RG1 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	1,4kg

