


Liquid Line-FX

Recessed mounted light system, mounting brackets incl -
Direct light distribution

Article code:
QFXLWE-840E-STRUCTURE-Lxxxx-B

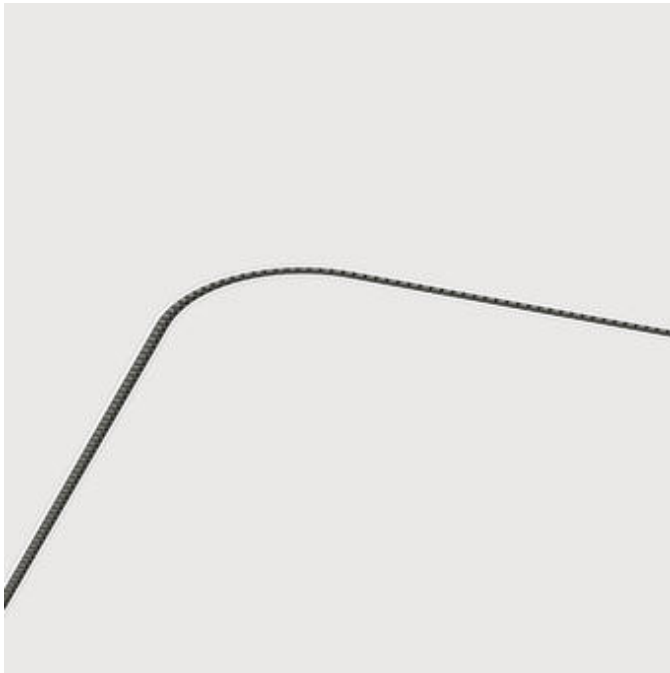

Illustrations may only be similar and serve as an orientation.







Liquid Line-FX. LED. Recessed mounted light system, mounting brackets incl. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre. High glare limitation, compatible for office applications. UGR<=19. Reflector: Jet Black. Switchable. according to drawing. LxWxH

(flexible) . Special length L=xxxxmm. W=40mm. H=65mm. Low-power current. 1690lm/m. 13W/m. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Liquid Line-FX

Recessed mounted light system, mounting brackets incl - Direct light distribution

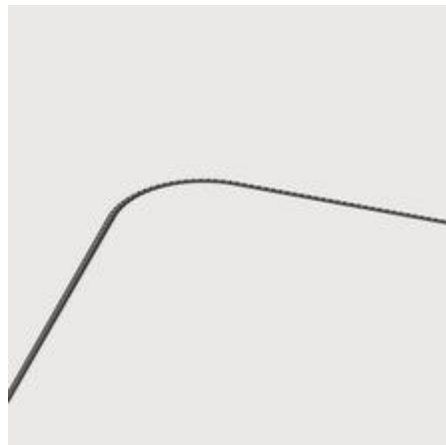

Article code:
QFXLWE-840E-STRUCTURE-Lxxxx-B

Customer / Project: _____

Note: _____

Productname	Liquid Line-FX
Lamp	LED
Installation Type	Recessed mounted light system, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Jet Black
Control	Switchable
Length L/Diameter D (mm)	Special length L=xxxxmm
Width W (mm)	W=40mm
Height H (mm)	H=65mm
Current/Power	Low-Power
Luminous Flux	1690lm/m
Power consumption	13W/m
Degree of protection	IP20
LED lifetime	L90B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Other	according to drawing

IP20

~220-240V

50-60 Hz

IK 02

RG0

≤3 MacAgn

LOW POWER

L90B10

50.000h

MEDIUM POWER

L85B10

50.000h

HIGH POWER

L80B10

50.000h

CE

UK CA