

Liquid Line-GX

Pendant light system - Direct light distribution

Article code:

QGXLWL-830H-STRUCTURE-Lxxxx-AW





Illustrations may only be similar and serve as an orientation.

Liquid Line-GX. LED. Pendant light system. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre. High glare limitation, compatible for office applications. UGR<=19. Reflector: Snow White. Dimmable DALI. according to drawing. LxWxH (flexible) . Special length L=xxxxmm. W=40mm. H=65mm. Single-cord suspension (Set). Pendant length max 1500mm. Power

supply: transparent. Ceiling rose: Matching luminaire`s surface colour. High-power current. 2955lm/m. 24W/m. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Liquid Line-GX

Pendant light system - Direct light distribution

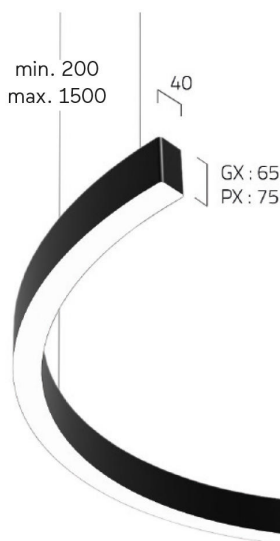

Article code:

QGXLWL-830H-STRUCTURE-Lxxxx-AW

Customer / Project: _____

Note: _____

Productname	Liquid Line-GX
Lamp	LED
Installation Type	Pendant light system
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Snow White
Control	Dimmable (DALI)
Length L/Diameter D (mm)	Special length L=xxxxmm
Width W (mm)	W=40mm
Height H (mm)	H=65mm
Current/Power	High-Power
Luminous Flux	2955lm/m
Power consumption	24W/m
Suspension	Single susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Other	according to drawing

