

# lightnet

## Liquid Line-F3

Recessed mounted light system, mounting brackets incl -  
Direct light distribution

Article code:  
QF3AWE-830H-STRUCTURE-Lxxxx



Illustrations may only be similar and serve as an orientation.





Liquid Line-F3. LED. Recessed mounted light system, mounting brackets incl. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. Switchable. according to drawing. LxWxH (flexible) . Special length L=xxxxmm. W=

60mm. H=74mm. High-power current. 2141lm/m. 31W/m. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Liquid Line-F3

Recessed mounted light system, mounting brackets incl - Direct light distribution

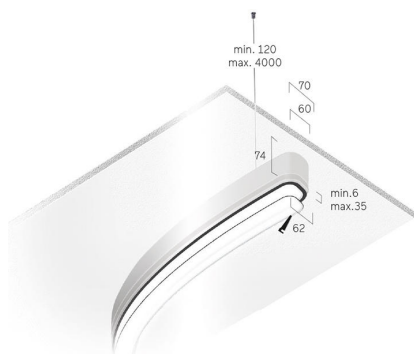

Article code:  
QF3AWE-830H-STRUCTURE-Lxxxx

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Liquid Line-F3
Lamp	LED
Installation Type	Recessed mounted light system, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	Special length L=xxxxmm
Width W (mm)	W=60mm
Height H (mm)	H=74mm
Current/Power	High-Power
Luminous Flux	2141lm/m
Power consumption	31W/m
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Other	according to drawing

