


## Matric-AX

Surface mounted light-line - Direct light distribution

Article code: LAXABE-830E-Lxxxx

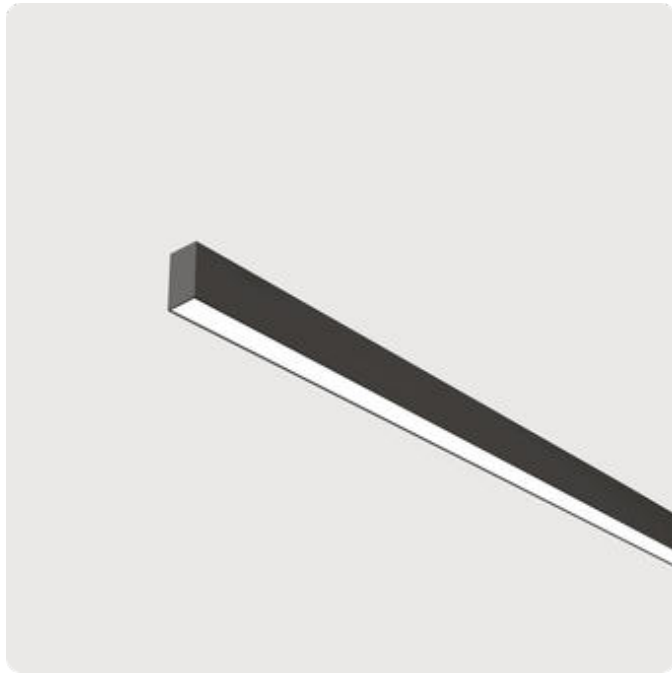



Illustrations may only be similar and serve as an orientation.

Matric-AX. LED. Wall or ceiling mounted light-line. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. Switchable. according to drawing. LxWxH (rectangular). Special length L=xxxxmm. W=40mm. H=65mm. Low-power

current. 972lm/m. 10W/m. Binning initial  $\leq$  MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Matric-AX

Surface mounted light-line - Direct light distribution

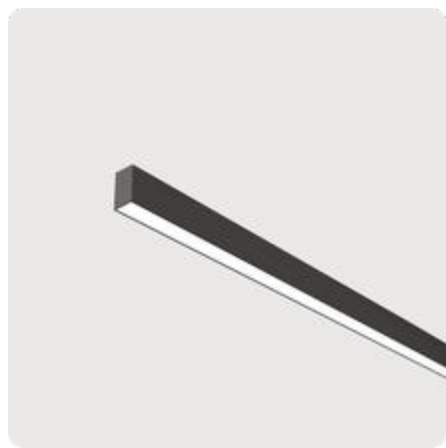

Article code: LAXABE-830E-Lxxxx

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Matric-AX
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Jet Black
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	Special length L=xxxxmm
Width W (mm)	W=40mm
Height H (mm)	H=65mm
Current/Power	Low-Power
Luminous Flux	972lm/m
Power consumption	10W/m
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L90B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Other	according to drawing

IP20

~220-240V

50-60 Hz

IK 02

RG0

≤3 MacAdam

MEDIUM POWER L85B10 50.000h

HIGH POWER L80B10 50.000h

CE

UK CA