

Caleo-X4

Surface mounted luminaire - Direct/indirect light distribution Article code: AX4OSE-830H-L900-S



Illustrations may only be similar and serve as an orientation.



Caleo-X4. LED. Wall or ceiling mounted luminaire in soft-edge design. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Reflector: Radiant Silver. Switchable. LxWxH (rectangular). L=900mm. W=200mm. H=25+25mm. High-

power current. 4871lm. 40W. 4,8kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Caleo-X4

Surface mounted luminaire - Direct/indirect light distribution

Article code: AX4OSE-830H-L900-S

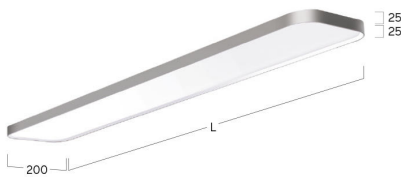

Customer / Project: _____

Note: _____

Productname	Caleo-X4
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Reflector Colour Inside	Reflector: Radiant Silver
Control	Switchable
Length L/Diameter D (mm)	L=900mm
Width W (mm)	W=200mm
Height H (mm)	H=25+25mm
Current/Power	High-Power
Luminous Flux	4871lm
Power consumption	40W
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4,8kg

