

Caleo-X4

Surface mounted luminaire - Direct/indirect light distribution Article code: AX4OSE-840H-L900-S



Illustrations may only be similar and serve as an orientation.



Caleo-X4. LED. Wall or ceiling mounted luminaire in soft-edge design. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Reflector: Radiant Silver. Switchable. LxWxH (rectangular). L=900mm. W=200mm. H=25+25mm. High-

power current. 5210lm. 40W. 4,8kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Caleo-X4

Surface mounted luminaire - Direct/indirect light distribution

Article code: AX4OSE-840H-L900-S

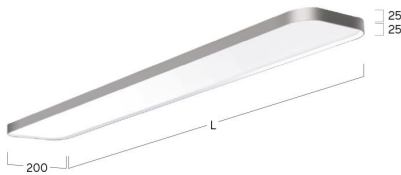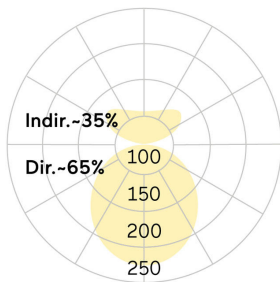

Customer / Project: _____

Note: _____

| | |
|------------------------------|------------------------------------|
| Productname | Caleo-X4 |
| Lamp | LED |
| Installation Type | Surface mounted luminaire |
| Surface finish | Radiant Silver |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Opal diffuser |
| Reflector Colour Inside | Reflector: Radiant Silver |
| Control | Switchable |
| Length L/Diameter D (mm) | L=900mm |
| Width W (mm) | W=200mm |
| Height H (mm) | H=25+25mm |
| Current/Power | High-Power |
| Luminous Flux | 5210lm |
| Power consumption | 40W |
| Degree of protection | IP20 |
| LED lifetime | L80B10 (tq 25°C) = 50.000h |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 4,8kg |

