

## Caleo-X4

Surface mounted luminaire - Direct/indirect light distribution    Article code: AX4ASE-830M-L1200-S



Illustrations may only be similar and serve as an orientation.



Caleo-X4. LED. Wall or ceiling mounted luminaire in soft-edge design. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR≤19. Reflector: Radiant Silver. Switchable. LxWxH (rectangular). L=1200mm. W=200mm. H=25+25mm.

Medium-power current. 4684lm. 39W. 6,4kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Caleo-X4

Surface mounted luminaire - Direct/indirect light distribution

Article code: AX4ASE-830M-L1200-S

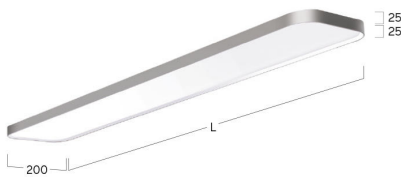

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Caleo-X4
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Radiant Silver
Control	Switchable
Length L/Diameter D (mm)	L=1200mm
Width W (mm)	W=200mm
Height H (mm)	H=25+25mm
Current/Power	Medium-Power
Luminous Flux	4684lm
Power consumption	39W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	6,4kg

