


Ringo Star-P1 Chandelier

Pendant luminaire - Direct/indirect light distribution

Article code: RP1OSL-840E-CW543-1500-K



Illustrations may only be similar and serve as an orientation.

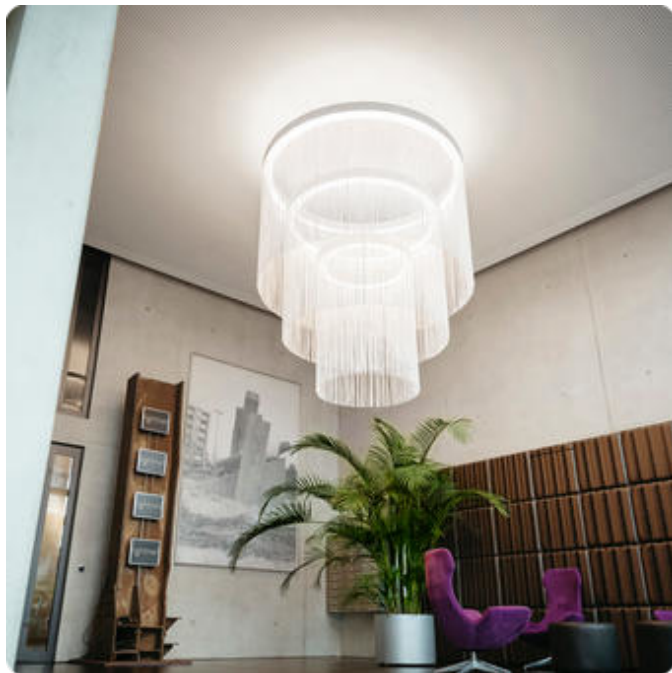



Ringo Star-P1 Chandelier. LED. Pendant luminaire as chandelier designed with high lumen packages and decorative lighting effect. Three ring structure, each wrapped with a thread-like material. Surface finish Radiant Silver. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Dimmable DALI. D1=2000mm. D2=1500mm. D3=1200mm. W=100mm. H=85mm. White Curtain. Length of Curtain 1500mm. Cord suspension for parallel installation with power supply cable and ceiling

rose (Set). Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Low-power current. Im on request. W on request. 63,3kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Ringo Star-P1 Chandelier

Pendant luminaire - Direct/indirect light distribution

Article code: RP1OSL-840E-CW543-1500-K

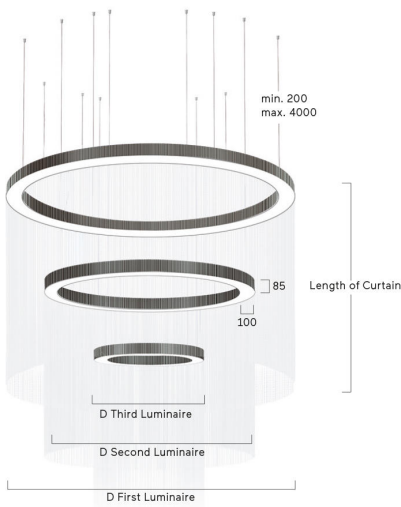

Customer / Project: _____

Note: _____

Productname	Ringo Star-P1 Chandelier
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (DALI)
D1 (mm)	D1=2000mm
D2 (mm)	D2=1500mm
D3 (mm)	D3=1200mm
Width W (mm)	W=100mm
Height H (mm)	H=85mm
Curtain	White Curtain
Length of Curtain (mm)	1500mm
Current/Power	Low-Power
Luminous Flux	lm on request
Power consumption	W on request
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L90B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	63,3kg

IP20

~220-240V

50-60 Hz

IK 02

RG0

≤3 MacAdam

LOW POWER L90B10 50000h

MEDIUM POWER L85B10 50000h

CE

UK CA