

## Caleo-X7

Surface mounted luminaire - Direct/indirect light distribution    Article code: AX7OSL-830M-Q500



Illustrations may only be similar and serve as an orientation.



Caleo-X7. LED. Wall or ceiling mounted luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lightingcorona. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Dimmable DALI. LxWxH (square). L=500mm. W=500mm. H=20+25mm. Medium-

power current. 4834lm. 39W. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Caleo-X7

Surface mounted luminaire - Direct/indirect light distribution

Article code: AX7OSL-830M-Q500

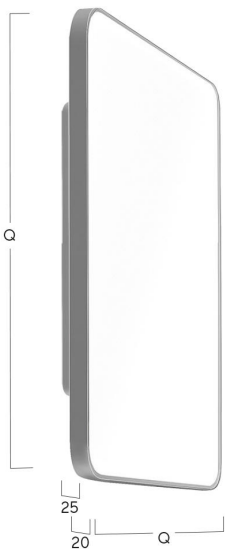

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Caleo-X7
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=500mm
Width W (mm)	W=500mm
Height H (mm)	H=20+25mm
Current/Power	Medium-Power
Luminous Flux	4834lm
Power consumption	39W
Degree of protection	IP40
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C

