

Cubic Evolution G6/P6 | Square Suspended

**Housing:**

Extruded Aluminum. LED pendant luminaire. Direct-Indirect or Direct only light distribution. Fully enclosed.

Optical System:

Microprismatic screen with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting.

Surface Finish:

Surface natural anodized or white, graphite, black or champagne coated. Further surface options see Lightnet-Surface-Collection. RAL or PANTONE of your choice.

Control:

Integral electronic driver dimmable 0-10V. Minimum dimming level 1%. Field replaceable. On request: DALI, DMX, Lutron, Casambi.

LED:

Available color temperatures: 2200K, 2700K, 3000K, 3500K, 4000K, 6500K, or Tunable White. All color temperatures available in CRI>80 or CRI>90. Optionally FULL SPECTRUM-LEDs for highest Fidelity Levels (Tm30). Tolerance within a 3-step MacAdam ellipse. Up to 110lm/W efficacy. Choice of different lumen output levels: Medium or High Power. Custom lumen output upon request. Lifetime minimum 50,000h with 85% of lumen maintenance.

Installation:

Height-adjustable parallel cord suspension with transparent power supply cable or rod suspension. Color of canopy matching luminaire body.

Certification & Warranty:


cETLus. 5 Years Warranty.

Order Guide


	1C P6 A B E-8 30 M-Q600-K
Product Family	1C: Cubic
Type	G6: Direct only, P6: Direct-Indirect
Optical System	A: Microprismatic, O: Opal Diffuser
Surface Finish	W: Snow White, E: Silver Anodized, U: Urban Graphite, B: Jet Black, H: Anodic Champagne
Control Gear	E: On/Off, D: 0-10V
Color Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Color Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K
Power	M: Medium Power, H: High Power
Size	Square Size in mm: Q300 (11.75"), Q400 (15.75"), Q500 (19.625"), Q600 (23.625"), Q800 (31.5")
Suspension	P: Tube Suspension, K: Parallel Suspension
On Request	DALI, DMX, Lutron System, Casambi




Light Performance

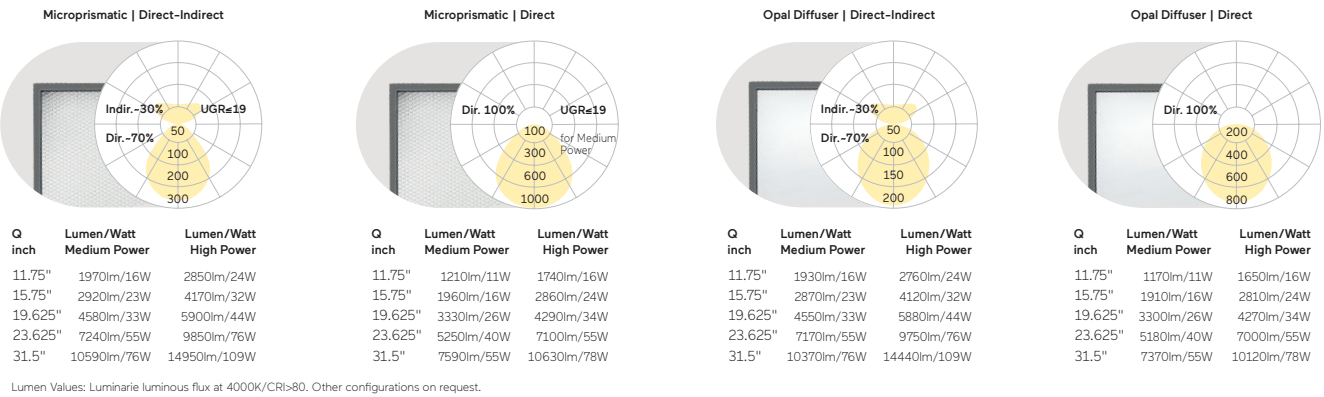

Dimensions







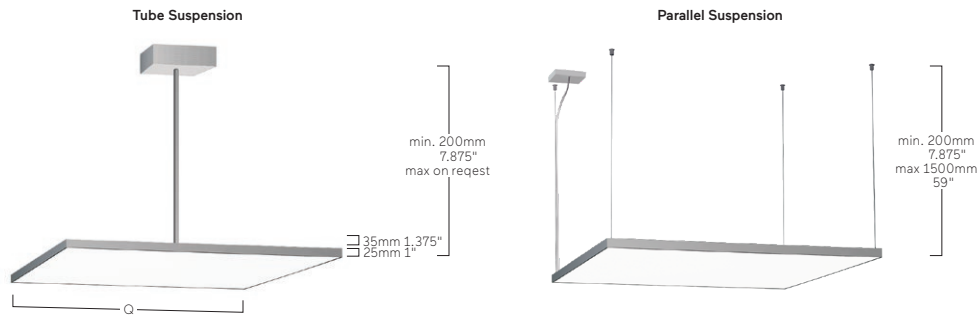


Surfaces

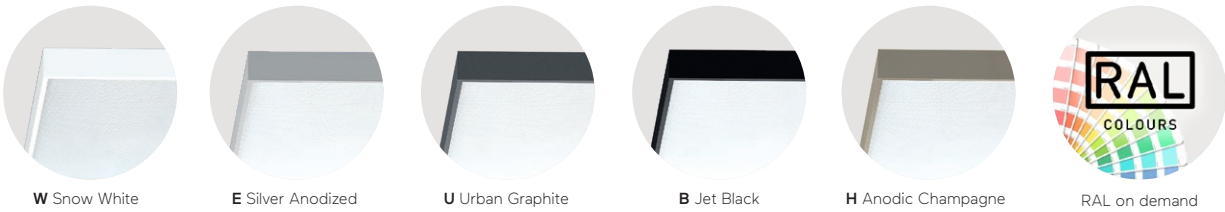

CUBIC EVOLUTION G6/P6 | SQUARE SUSPENDED PARALLEL SUSPENSION

1. MOUNTING AND INSTALLATION | MONTAGE ET INSTALLATION:

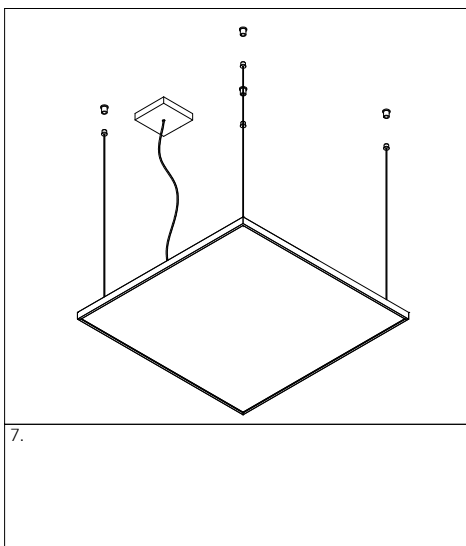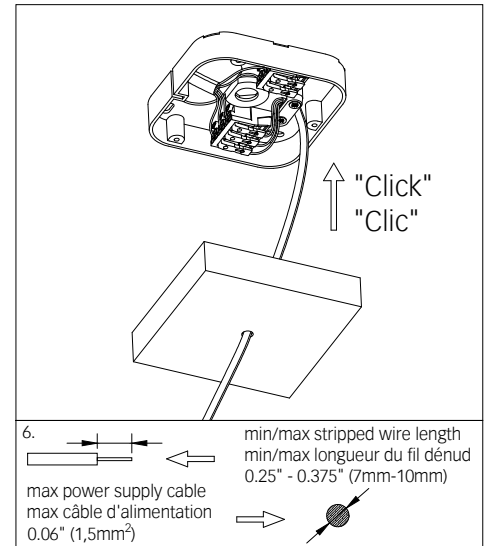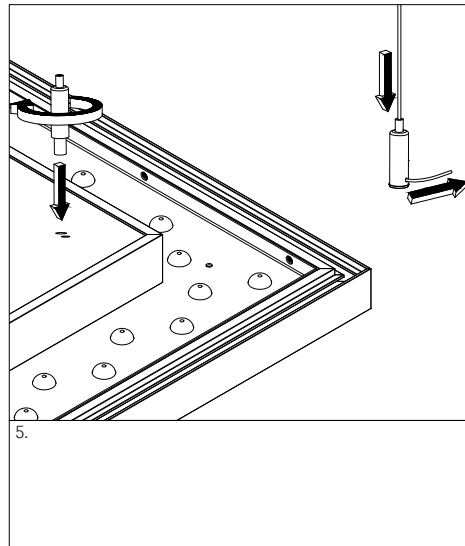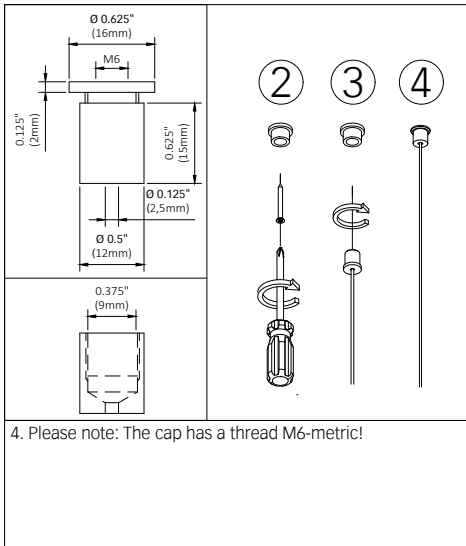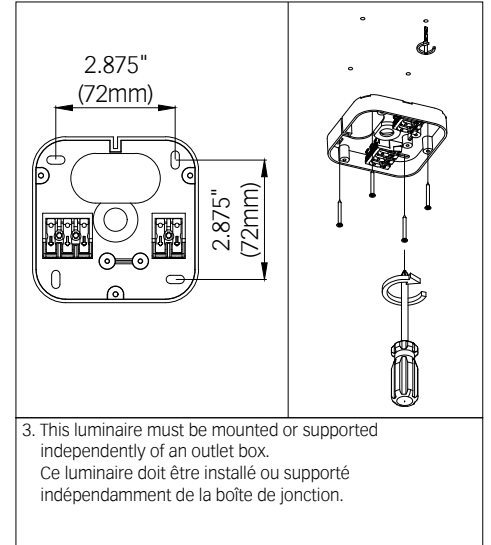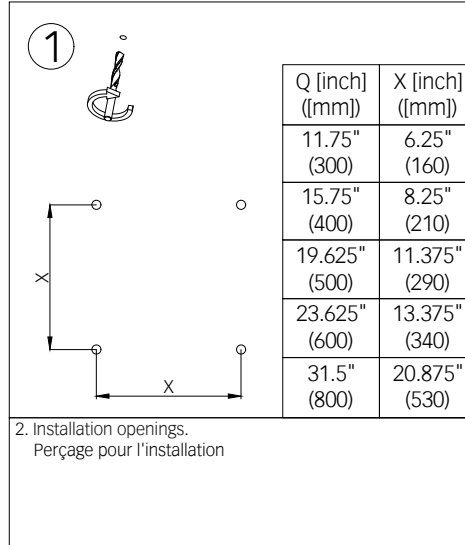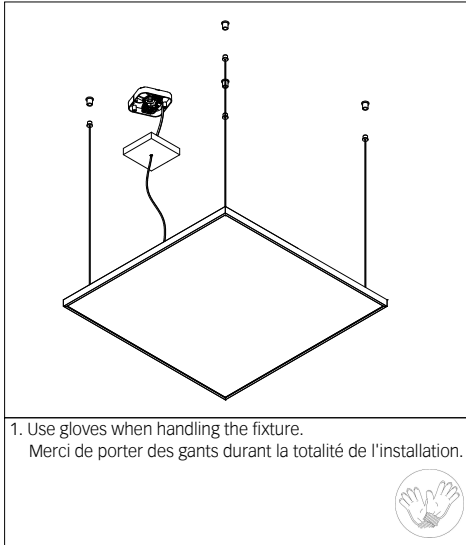

WARNING: RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT: EXACT DIMENSIONS IN MM!

ATTENTION: RISQUE D'INCENDIE ET D'ÉLECTROCUTION. LE LUMINAIRE DOIT ÊTRE INSTALLÉ PAR UN ÉLECTRICIEN QUALIFIÉ, CONFORMÉMENT AUX NORMES NATIONALES EN VIGUEUR, CODES DE CONSTRUCTION ET D'ÉLECTRICITÉ LOCAUX. DÉBRANCHEZ L'ALIMENTATION AU PANNEAU ÉLECTRIQUE AVANT DE PROCÉDER À L'ENTRETIEN.

IMPORTANT: LES DIMENSIONS EXACTES SONT EN MM!