

lightnet

Cubic-M4

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: 1CM4OED-830M-Q479



Illustrations may only be similar and serve as an orientation.





Cubic-M4. LED. Recessed mounted luminaire with frame for ceilings with cut-out openings, mounting brackets included. Surface finish Silver Anodised. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Single dimmed 0-10V. LxWxH (square). L=18,9". W=18,9". H=3,9". Medium-

power current. 2066lm. 19W. 15lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Cubic-M4

Recessed mounted luminaire for ceilings,
mounting brackets incl - Direct light distribution

Article code: 1CM4OED-830M-Q479

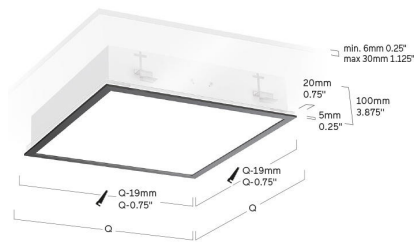

Customer / Project: _____

Note: _____

Productname	Cubic-M4
Lamp	LED
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (0-10V)
Length L/Diameter D (in)	L=18,9"
Width W (in)	W=18,9"
Height H (in)	H=3,9"
Current/Power	Medium-Power
Luminous Flux	2066lm
Power consumption	19W
Voltage	120-277V
Degree of protection	IP20
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	15lbs

