

# lightnet

## Cubic-M4

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: 1CM4OED-835H-Q621



Illustrations may only be similar and serve as an orientation.





Cubic-M4. LED. Recessed mounted luminaire with frame for ceilings with cut-out openings, mounting brackets included. Surface finish Silver Anodised. Direct only light distribution. Color temperature: 3500K (Neutral White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Single dimmed 0-10V. LxWxH (square). L=24,4". W=24,4". H=3,9". High-

power current. 7120lm. 58W. 18,1lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Cubic-M4

Recessed mounted luminaire for ceilings,  
mounting brackets incl - Direct light distribution

Article code: 1CM4OED-835H-Q621

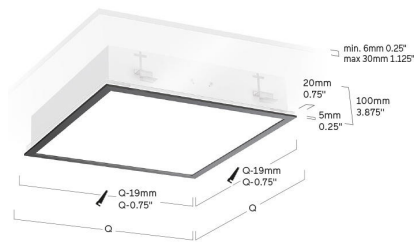

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-M4
Lamp	LED
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Color temperature	3500K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (0-10V)
Length L/Diameter D (in)	L=24,4"
Width W (in)	W=24,4"
Height H (in)	H=3,9"
Current/Power	High-Power
Luminous Flux	7120lm
Power consumption	58W
Voltage	120-277V
Degree of protection	IP20
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	18,1lbs

