

Ringo Star-PY Acoustic

Acoustic pendant luminaire - Direct/indirect light distribution

Article code: 1RPYCWD-840M-D1245-K-AW



Illustrations may only be similar and serve as an orientation.



Ringo Star-PY Acoustic. LED. Acoustic pendant luminaire made with 1.625" profile width. Surface finish Snow White. Direct/indirect light distribution. Color temperature: 4000K (Cool White). Color Rendering Index (CRI): >80. Opal Flex Diffuser. Single dimmed 0-10V. DxHxW (round). D=49". W=1,6". H=1,6". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max 158". Power supply: transparent. Canopy: Matching luminaire`s surface color. Acoustic

element: White Perforated. Medium-power current. 13200lm. 142W. 29,8lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-PY Acoustic

Acoustic pendant luminaire - Direct/indirect light distribution

Article code: 1RPYCWD-840M-D1245-K-AW

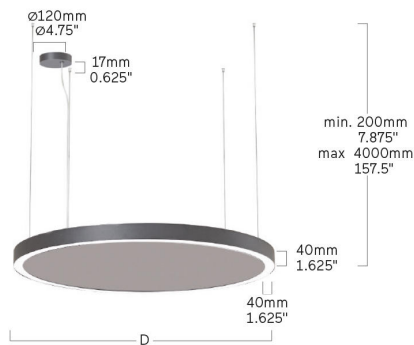

Customer / Project: _____

Note: _____

Productname	Ringo Star-PY Acoustic
Lamp	LED
Installation Type	Acoustic pendant luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Color temperature	4000K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal Flex Diffuser
Control	Dimmable (0-10V)
Length L/Diameter D (in)	D=49"
Width W (in)	W=1,6"
Height H (in)	H=1,6"
Current/Power	Medium-Power
Luminous Flux	13200lm
Power consumption	142W
Voltage	120-277V
Degree of protection	IP20
Suspension	Parallel cord susp (Set) Pendant length max 158"
Acoustic absorber	Absorber (White Perforated)
LED lifetime	L85/50,000h (tq 25°C)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	29,8lbs

