

Ringo Star-FX

Recessed mounted luminaire, mounting brackets incl -
Direct light distribution

Article code: 1RFXLSE-830E-D610-A





Illustrations may only be similar and serve as an orientation.

Ringo Star-FX. LED. Recessed mounted luminaire made of 1.625" profile width for ceilings with cut-out openings, mounting brackets incl. Surface finish Radiant Silver. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Lens Louver: precision lenses with louver. High glare limitation, compatible for office applications. UGR<=19. Reflector: Satin Silver. Switchable. DxHxW (round). D=24". W=2". H=2,6". Low-

power current. 2740lm. 23W. 10,6lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc.

Ringo Star-FX

Recessed mounted luminaire, mounting brackets
incl - Direct light distribution

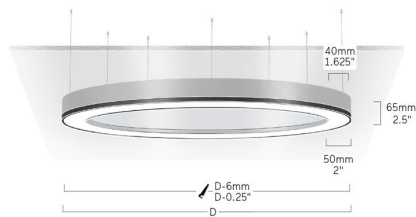

Article code: 1RFXLSE-830E-D610-A

Customer / Project: _____

Note: _____

Productname	Ringo Star-FX
Lamp	LED
Installation Type	Recessed mounted luminaire, mounting brackets incl
Surface finish	Radiant Silver
Light characteristics	Direct light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Lens Louver
UGR	UGR<=19
Reflector Color Inside	Reflector: Satin Silver
Control	Switchable
Length L/Diameter D (in)	D=24"
Width W (in)	W=2"
Height H (in)	H=2,6"
Current/Power	Low-Power
Luminous Flux	2740lm
Power consumption	23W
Voltage	120-277V
Degree of protection	IP20
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Weight (lbs)	10,6lbs

