

## Ringo Star-G1 Acoustic

Acoustic pendant luminaire - Direct light distribution

Article code: 1RG1OBE-830M-D600-U-AW



Illustrations may only be similar and serve as an orientation.



Ringo Star-G1 Acoustic. LED. Acoustic pendant luminaire made of 3.875" profile width. Surface finish Jet Black. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Switchable. DxHxW (round). D=23,6". W=3,9". H=3,3". Central cord suspension with canopy and power supply cable (Set). Pendant length max 158". Power supply: transparent. Canopy: Matching luminaire`s

surface color. Acoustic element: White Perforated. Medium-power current. 4899lm. 44W. 15,4lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-G1 Acoustic

Acoustic pendant luminaire - Direct light distribution

Article code: 1RG1OBE-830M-D600-U-AW

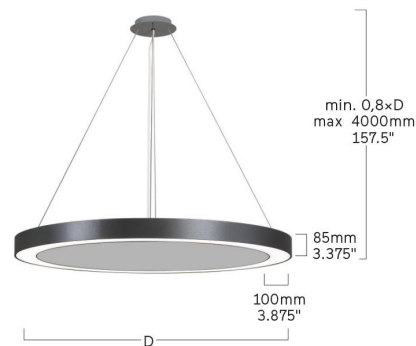

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Ringo Star-G1 Acoustic
Lamp	LED
Installation Type	Acoustic pendant luminaire
Surface finish	Jet Black
Light characteristics	Direct light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (in)	D=23,6"
Width W (in)	W=3,9"
Height H (in)	H=3,3"
Current/Power	Medium-Power
Luminous Flux	4899lm
Power consumption	44W
Voltage	120-277V
Degree of protection	IP20
Suspension	Central cord susp. (Set) Pendant length max 158"
Acoustic absorber	Absorber (White Perforated)
LED lifetime	L85/50,000h (tq 25°C)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	15,4lbs

