

lightnet

Ringo Star-A1

Surface mounted luminaire - Direct light distribution

Article code: 1RA1ASD-830E-D1200



Illustrations may only be similar and serve as an orientation.





Ringo Star-A1. LED. Surface-mounted luminaire made of 3.875" profile width. Surface finish Radiant Silver. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. Single dimmed 0-10V. DxHxW (round). D=47,2". W=3,9". H=3,3". Low-power

current. 8228lm. 77W. 27,8lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-A1

Surface mounted luminaire - Direct light distribution

Article code: 1RA1ASD-830E-D1200

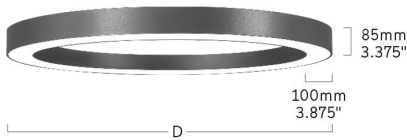

Customer / Project: _____

Note: _____

Productname	Ringo Star-A1
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Dimmable (0-10V)
Length L/Diameter D (in)	D=47,2"
Width W (in)	W=3,9"
Height H (in)	H=3,3"
Current/Power	Low-Power
Luminous Flux	8228lm
Power consumption	77W
Voltage	120-277V
Degree of protection	IP20
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	27,8lbs

