

lightnet

Basic-A3

Surface mounted luminaire - Direct light distribution

Article code: 1BA3ABE-830M-D800-G



Illustrations may only be similar and serve as an orientation.





Basic-A3. LED. Surface-mounted luminaire for walls or ceilings. Surface finish Jet Black. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR<=19. Reflector: Satin Gold. Switchable. DxH (round). D=31,5". H=2,3". Medium-power current. 5012lm. 44W. 34,8lbs. Binning initial

<= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Basic-A3

Surface mounted luminaire - Direct light distribution

Article code: 1BA3ABE-830M-D800-G

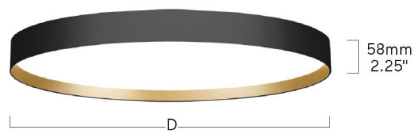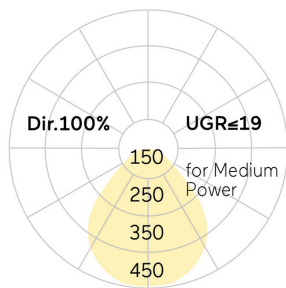

Customer / Project: _____

Note: _____

Productname	Basic-A3
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Jet Black
Light characteristics	Direct light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
UGR	UGR<=19
Reflector Color Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (in)	D=31,5"
Height H (in)	H=2,3"
Current/Power	Medium-Power
Luminous Flux	5012lm
Power consumption	44W
Voltage	120-277V
Degree of protection	IP20
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Weight (lbs)	34,8lbs

