

lightnet

Basic-P5

Pendant luminaire - Direct/indirect light distribution

Article code: 1BP5ABD-830H-D800-P



Illustrations may only be similar and serve as an orientation.





Basic-P5. LED. Pendant luminaire with minimal overall height of 1.5" without additional spacers. Direct/indirect light distribution. Microprismatic screen for reduced luminance in office areas. Surface finish Jet Black. $UGR \leq 19$. Single dimmed 0-10V. Color Rendering Index (CRI): >80 . Color temperature: 3000K (Warm White). High-power current. D x H (round). D=31,5". H=1,5". Rod suspension with canopy (Set). Pendant length on request. Canopy: Matching luminaire`s

surface color. 9752lm. 81W. Binning initial \leq MacAdam 3. 20,9lbs. IP40. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Basic-P5

Pendant luminaire - Direct/indirect light distribution

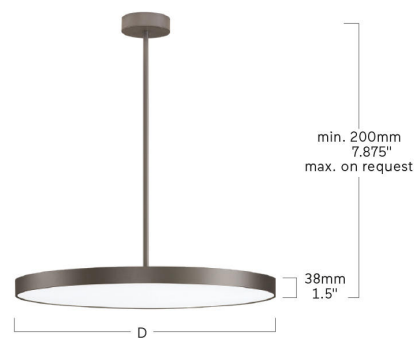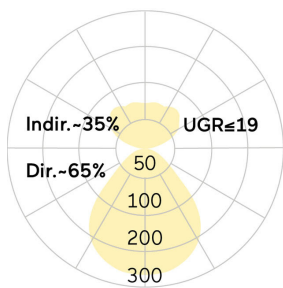

Article code: 1BP5ABD-830H-D800-P

Customer / Project: _____

Note: _____

Productname	Basic-P5
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Microprismatic screen
Surface finish	Jet Black
Control	Dimmable (0-10V)
Color Rendering Index (CRI)	CRI>80
Color temperature	3000K
Current/Power	High-Power
Length L/Diameter D (in)	D=31,5"
Height H (in)	H=1,5"
Luminous Flux	9752lm
Power consumption	81W
Voltage	120-277V
Degree of protection	IP40
UGR	UGR<=19
Suspension	Rod susp. (Set)
LED lifetime	Pendant length on request
Certification	L85/50,000h (tq 25°C)
Indoor/Outdoor	cETLus
Weight (lbs)	Indoor: ta [ambient] max. 25°C
	20,9lbs

