lightnet

Caleo-P4

Pendant luminaire - Direct/indirect light distribution

Article code: 1AP4AWD-830M-L900-KG



Illustrations may only be similar and serve as an orientation.


Caleo-P4. LED. Tiered pendant luminaire with 1" visible trim. Direct/indirect light distribution. Microprismatic screen for reduced luminance in office areas. Surface finish Snow White. UGR<=19. Single dimmed 0-10V. Color Rendering Index (CRI): >80. Color temperature: 3000K (Warm White). Medium-power current. LxWxH (rectangular). L=35,4". W= 7,9". H=1"+1,4". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max 59". Power supply: transparent. Canopy: Matching luminaire`s surface color. Reflector: Satin Gold. 3516lm. 31W. Binning initial <= MacAdam 3. 8,4lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

© LIGHTNET USA, INC | 2937 SW 27TH AVE STE 305 | MIAMI, FL 33133, Phone: (+1) 800-940-9092, E-Mail: info@lightnet.us, Internet: www.lightnet.us We reserve the right to make mistakes or modifications. Illustrations may only be similar and serve as an orientation. Kindly always check you are working with current version of mounting instruction.

lightnet

Caleo-P4

Pendant luminaire - Direct/indirect light distribution

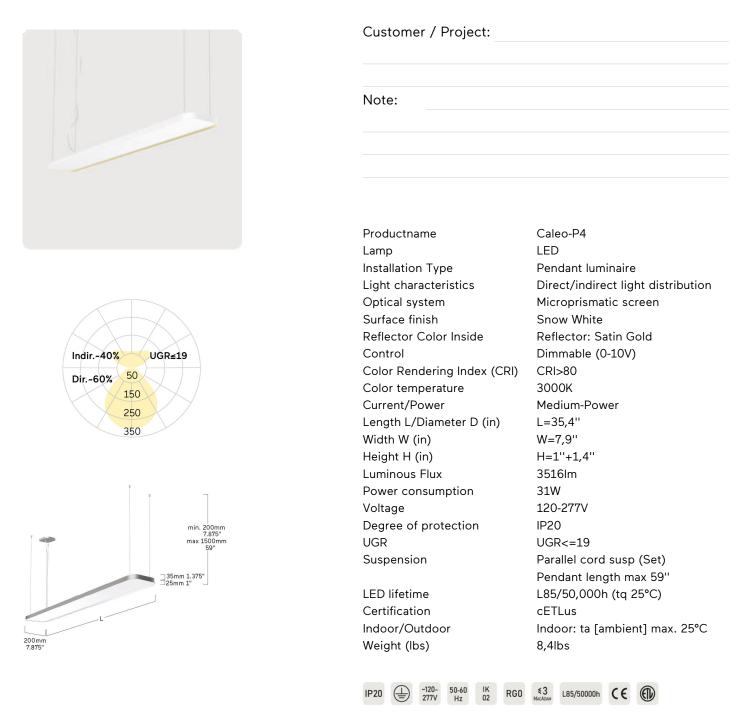

Article code: 1AP4AWD-830M-L900-KG