

## Caleo-P4

Pendant luminaire - Direct/indirect light distribution

Article code: 1AP4AWD-827M-L900-KG



Illustrations may only be similar and serve as an orientation.



Caleo-P4. LED. Tiered pendant luminaire with 1" visible trim. Direct/indirect light distribution. Microprismatic screen for reduced luminance in office areas. Surface finish Snow White. UGR $\leq$ 19. Single dimmed 0-10V. Color Rendering Index (CRI):  $>80$ . Color temperature: 2700K (Soft White). Medium-power current. LxWxH (rectangular). L=35,4". W=7,9". H=1"+1,4". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max 59". Power supply: transparent.

Canopy: Matching luminaire's surface color. Reflector: Satin Gold. 3516lm. 31W. Binning initial  $\leq$  MacAdam 3. 8,4lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Caleo-P4

Pendant luminaire - Direct/indirect light distribution

Article code: 1AP4AWD-827M-L900-KG

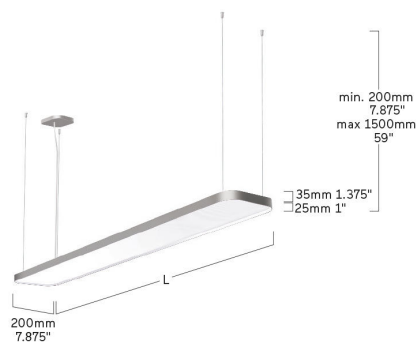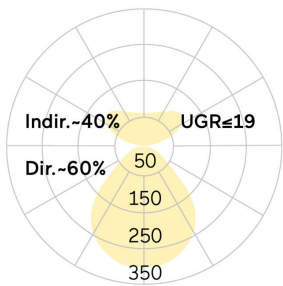

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Caleo-P4
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Microprismatic screen
Surface finish	Snow White
Reflector Color Inside	Reflector: Satin Gold
Control	Dimmable (0-10V)
Color Rendering Index (CRI)	CRI>80
Color temperature	2700K
Current/Power	Medium-Power
Length L/Diameter D (in)	L=35,4"
Width W (in)	W=7,9"
Height H (in)	H=1"+1,4"
Luminous Flux	3516lm
Power consumption	31W
Voltage	120-277V
Degree of protection	IP20
UGR	UGR<=19
Suspension	Parallel cord susp (Set) Pendant length max 59"
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	8,4lbs

