

Matric-F9

Recessed mounted luminaire, mounting brackets incl -
Direct light distribution

Article code: 1LF9ABE-830E-Lxxxx-G



Illustrations may only be similar and serve as an orientation.



Matric-F9. LED. Recessed mounted LED luminaire for installation in ceiling cut-outs openings, mounting brackets included. Surface finish Jet Black. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. Reflector: Satin Gold. Switchable. according to drawing. LxWxH (rectangular).

L=xxxx". W=2,8". H=3". Low-power current. 281lm/ft. 3W/ft. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Matric-F9

Recessed mounted luminaire, mounting brackets
incl - Direct light distribution

Article code: 1LF9ABE-830E-Lxxxx-G

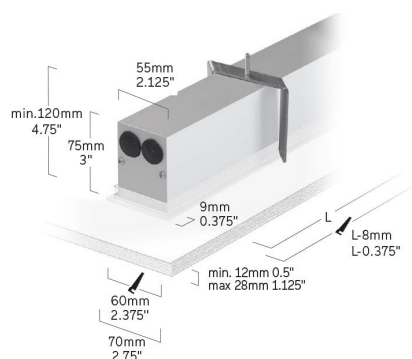

Customer / Project: _____

Note: _____

| | |
|-----------------------------|---|
| Productname | Matric-F9 |
| Lamp | LED |
| Installation Type | Recessed mounted luminaire, mounting brackets incl |
| Surface finish | Jet Black |
| Light characteristics | Direct light distribution |
| Color temperature | 3000K |
| Color Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Reflector Color Inside | Reflector: Satin Gold |
| Control | Switchable |
| Length L/Diameter D (in) | L=xxxx" |
| Width W (in) | W=2,8" |
| Height H (in) | H=3" |
| Current/Power | Low-Power |
| Luminous Flux | 281lm/ft |
| Power consumption | 3W/ft |
| Voltage | 120-277V |
| Degree of protection | IP20 |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| LED lifetime | L85/50,000h (tq 25°C) |
| Certification | cETLus |
| Other | according to drawing |

