

Matric-W6

Wall mounted luminaire - Direct/indirect light distribution

Article code: 1LW6ABE-830M-L890



Illustrations may only be similar and serve as an orientation.



Matric-W6. LED. Surface-mounted luminaire for horizontal wall mounting. Surface finish Jet Black. Direct/indirect light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR≤19. Switchable. LxWxH (rectangular). L=35". W=4,6". H=2,4". Medium-power

current. 4011lm. 33W. 8,2lbs. Binning initial ≤ MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Matric-W6

Wall mounted luminaire - Direct/indirect light distribution

Article code: 1LW6ABE-830M-L890

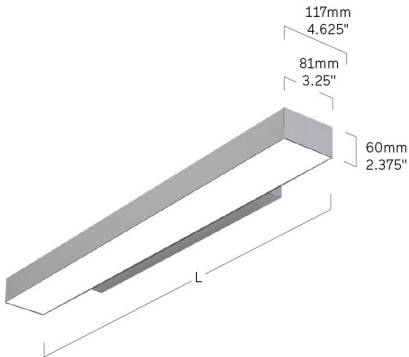

Customer / Project: _____

Note: _____

Productname	Matric-W6
Lamp	LED
Installation Type	Wall mounted luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
UGR	UGR<=19
Control	Switchable
Length L/Diameter D (in)	L=35"
Width W (in)	W=4,6"
Height H (in)	H=2,4"
Current/Power	Medium-Power
Luminous Flux	4011lm
Power consumption	33W
Voltage	120-277V
Degree of protection	IP20
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	8,2lbs

