

# lightnet

## Basic-M4

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: 1BM4OWE-835E-D320



Illustrations may only be similar and serve as an orientation.

Basic-M4. LED. Recessed mounted luminaire with frame for ceilings with cut-out openings, mounting brackets incl. Surface finish Snow White. Direct only light distribution. Color temperature: 3500K (Neutral White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Switchable. DxH (round). D=12,6". H=3,9". Low-power current. 910lm. 7W.

6,8lbs. Binning initial <= MacAdam 3. IP40. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Basic-M4



Recessed mounted luminaire for ceilings,  
mounting brackets incl - Direct light distribution

Article code: 1BM4OWE-835E-D320



Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

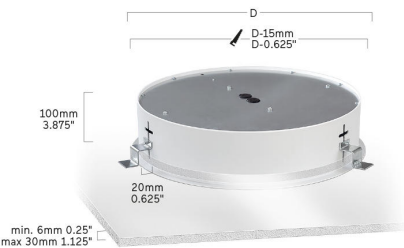

Productname	Basic-M4
Lamp	LED
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct light distribution
Color temperature	3500K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (in)	D=12,6"
Height H (in)	H=3,9"
Current/Power	Low-Power
Luminous Flux	910lm
Power consumption	7W
Voltage	120-277V
Degree of protection	IP40
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	6,8lbs

