

lightnet

Basic-A3

Surface mounted luminaire - Direct light distribution

Article code: 1BA3OWD-840H-D300-G



Illustrations may only be similar and serve as an orientation.





Basic-A3. LED. Surface-mounted luminaire for walls or ceilings. Surface finish Snow White. Direct only light distribution. Color temperature: 4000K (Cool White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Reflector: Satin Gold. Single dimmed 0-10V. DxH (round). D=11,8". H=2,3". High-power current. 1400lm. 13W. 6,4lbs. Binning initial <=

MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Basic-A3

Surface mounted luminaire - Direct light distribution

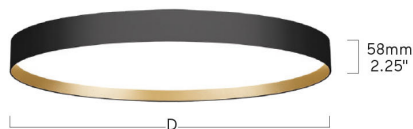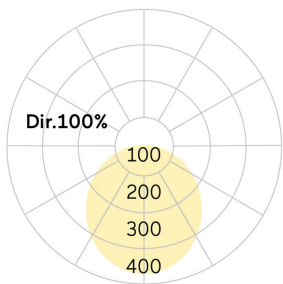

Article code: 1BA3OWD-840H-D300-G

Customer / Project: _____

Note: _____

| | |
|-----------------------------|--------------------------------|
| Productname | Basic-A3 |
| Lamp | LED |
| Installation Type | Surface mounted luminaire |
| Surface finish | Snow White |
| Light characteristics | Direct light distribution |
| Color temperature | 4000K |
| Color Rendering Index (CRI) | CRI>80 |
| Optical system | Opal diffuser |
| Reflector Color Inside | Reflector: Satin Gold |
| Control | Dimmable (0-10V) |
| Length L/Diameter D (in) | D=11,8" |
| Height H (in) | H=2,3" |
| Current/Power | High-Power |
| Luminous Flux | 1400lm |
| Power consumption | 13W |
| Voltage | 120-277V |
| Degree of protection | IP20 |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| LED lifetime | L85/50,000h (tq 25°C) |
| Certification | cETLus |
| Weight (lbs) | 6,4lbs |

IP40

-120-277V

50-60 Hz

IK 02

RG0

≤3 MACADAM

L85/50000h

CE

ETL