

# lightnet

## Basic-A3

Surface mounted luminaire - Direct light distribution

Article code: 1BA3ASD-835M-D300-S



Illustrations may only be similar and serve as an orientation.



Basic-A3. LED. Surface-mounted luminaire for walls or ceilings. Surface finish Radiant Silver. Direct only light distribution. Color temperature: 3500K (Neutral White). Color Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR<=19. Reflector: Radiant Silver. Single dimmed 0-10V. DxH (round). D=11,8". H=2,3". Medium-power current. 830lm. 8W. 6,4lbs. Binning

initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Basic-A3



Surface mounted luminaire - Direct light distribution

Article code: 1BA3ASD-835M-D300-S



Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

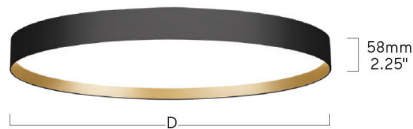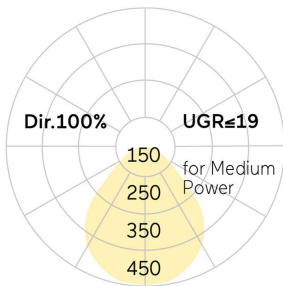

Productname	Basic-A3
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct light distribution
Color temperature	3500K
Color Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
UGR	UGR<=19
Reflector Color Inside	Reflector: Radiant Silver
Control	Dimmable (0-10V)
Length L/Diameter D (in)	D=11,8"
Height H (in)	H=2,3"
Current/Power	Medium-Power
Luminous Flux	830lm
Power consumption	8W
Voltage	120-277V
Degree of protection	IP20
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Weight (lbs)	6,4lbs

