

# lightnet

## Basic-A3

Surface mounted luminaire - Direct light distribution

Article code: 1BA3OBD-835H-D300-B



Illustrations may only be similar and serve as an orientation.





Basic-A3. LED. Surface-mounted luminaire for walls or ceilings. Surface finish Jet Black. Direct only light distribution. Color temperature: 3500K (Neutral White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Reflector: Jet Black. Single dimmed 0-10V. DxH (round). D= 11,8". H=2,3". High-power current. 1400lm. 13W. 6,4lbs. Binning initial <=

MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Basic-A3

Surface mounted luminaire - Direct light distribution

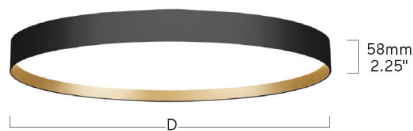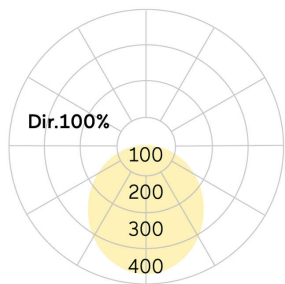

Article code: 1BA3OBD-835H-D300-B

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                             |                                |
|-----------------------------|--------------------------------|
| Productname                 | Basic-A3                       |
| Lamp                        | LED                            |
| Installation Type           | Surface mounted luminaire      |
| Surface finish              | Jet Black                      |
| Light characteristics       | Direct light distribution      |
| Color temperature           | 3500K                          |
| Color Rendering Index (CRI) | CRI>80                         |
| Optical system              | Opal diffuser                  |
| Reflector Color Inside      | Reflector: Jet Black           |
| Control                     | Dimmable (0-10V)               |
| Length L/Diameter D (in)    | D=11,8"                        |
| Height H (in)               | H=2,3"                         |
| Current/Power               | High-Power                     |
| Luminous Flux               | 1400lm                         |
| Power consumption           | 13W                            |
| Voltage                     | 120-277V                       |
| Degree of protection        | IP20                           |
| Indoor/Outdoor              | Indoor: ta [ambient] max. 25°C |
| LED lifetime                | L85/50,000h (tq 25°C)          |
| Certification               | cETLus                         |
| Weight (lbs)                | 6,4lbs                         |

IP40

-120-277V

50-60 Hz

IK 02

RG0

≤3 MACADAM

L85/50000h

CE

ETL