

lightnet


Cubic-P6

Pendant luminaire - Direct/indirect light distribution

Article code: 1CP6OBE-840H-Q300-P



Illustrations may only be similar and serve as an orientation.


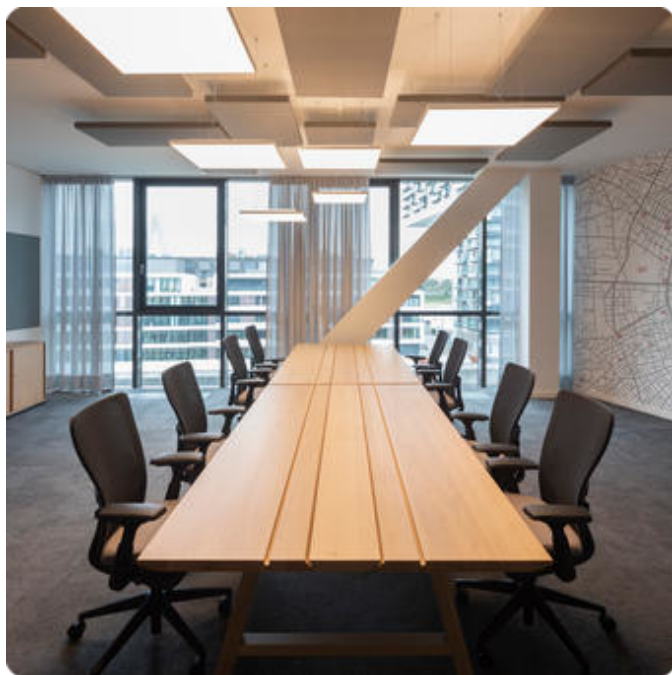


Cubic-P6. LED. Pendant luminaire. Direct/indirect light distribution. Opal diffuser for enhanced light transmission and uniform illumination. Surface finish Jet Black. Switchable. Color Rendering Index (CRI): >80. Color temperature: 4000K (Cool White). High-power current. LxWxH (square). L=11,8". W=11,8". H=1"+1,4". Rod suspension with canopy (Set). Pendant length on request. Canopy: Matching

luminaire`s surface color. 2760lm. 24W. Binning initial <= MacAdam 3. 5,5lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Cubic-P6

Pendant luminaire - Direct/indirect light distribution

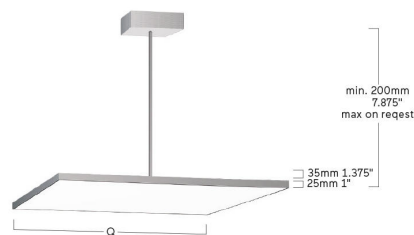

Article code: 1CP6OBE-840H-Q300-P

Customer / Project: _____

Note: _____

Productname	Cubic-P6
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Opal diffuser
Surface finish	Jet Black
Control	Switchable
Color Rendering Index (CRI)	CRI>80
Color temperature	4000K
Current/Power	High-Power
Length L/Diameter D (in)	L=11,8"
Width W (in)	W=11,8"
Height H (in)	H=1"+1,4"
Luminous Flux	2760lm
Power consumption	24W
Voltage	120-277V
Degree of protection	IP20
Suspension	Rod susp. (Set)
	Pendant length on request
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	5,5lbs

IP20

-120-277V

50-60 Hz

IK 02

RG0

≤3 MACADAM

L85/50000h

CE